

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 020 381 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
19.07.2000 Bulletin 2000/29

(51) Int. Cl.7: B65G 47/90

(21) Application number: 00201222.7

(22) Date of filing: 09.06.1995

(84) Designated Contracting States:  
AT BE CH DE DK FR GB IE IT LI NL SE

(30) Priority: 10.06.1994 US 258557

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
95303995.5 / 0 686 585

(71) Applicant:  
JOHNSON & JOHNSON VISION PRODUCTS,  
INC.  
Jacksonville, Florida 32216 (US)

(72) Inventors:  
• Martin, Wallace Anthony  
Orange Park, Florida 32065 (US)  
• Edwards, Russell James  
Jacksonville, Florida 32258 (US)  
• Gundersen, Borge Peter  
3080 Tikob (DK)  
• Keene, Darren Scott  
Jacksonville, Florida 32257 (US)

- Kindt-Larsen, Ture  
2840 Holte (DK)
- Lepper, John Mark  
West Jacksonville, Florida 32257 (US)
- Madsen, Niels Jorgen  
3450 Allerod (DK)
- Ravn, Thomas Christian  
3000 Helsingør (DK)
- Wang, Daniel Tsu-Fang  
Jacksonville, Florida 32225 (US)
- Holley, William Edward  
Ponte Vedra Beach, Florida 32087 (US)

(74) Representative:  
Mercer, Christopher Paul et al  
Carpmaels & Ransford  
43, Bloomsbury Square  
London WC1A 2RA (GB)


Remarks:

This application was filed on 04 - 04 - 2000 as a  
divisional application to the application mentioned  
under INID code 62.

(54) Automated apparatus and method for preparing contact lenses for inspection and  
packaging

(57) An automated apparatus for automatically  
inspecting and packaging contact lenses (8) in a contact  
lens fabrication facility comprises an inspection pallet  
(10), an automatic lens inspection station (15), an artic-

ulated robotic transfer device (200), a controller and a  
second robotic transfer device (300).

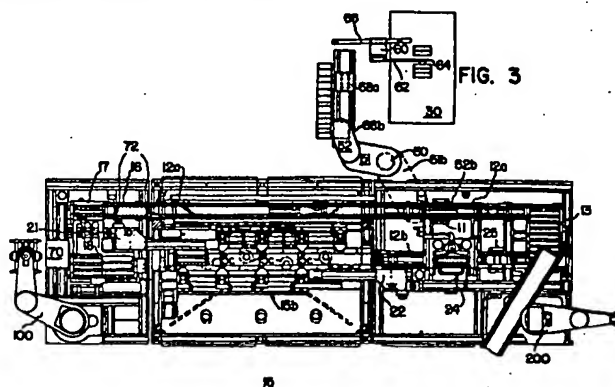

EP 1 020 381 A2

BEST AVAILABLE COPY

**Description****1. Field of the Invention**

- 5 [0001] The present invention relates generally to the field of manufacturing ophthalmic lenses, especially molded, hydrophilic contact lenses, and more specifically to an automated apparatus for handling and preparing contact lenses for inspection and packaging.

**2. Description of the Prior Art**

- 10 [0002] The molding of hydrophilic contact lenses is disclosed in U.S. Patent No. 4,495,313 to Larsen; U.S. Patent No. 4,640,489 to Larsen, et al.; U.S. Patent No. 4,680,336 to Larsen et al.; U.S. Patent No. 4,889,664 to Larsen et al.; and U.S. Patent No. 5,039,459 to Larsen et al., all of which are assigned to the assignee of the present invention.
- 15 [0003] These prior art references disclose a contact lens production process wherein each lens is formed by sandwiching a monomer or monomer mixture between a front curve (lower) mold section and back curve (upper) mold section, carried in a two by four mold array. The monomer is polymerized, thus forming a lens which is then removed from the mold sections and further treated in a hydration bath and packaged for consumer use.
- 20 [0004] U.S. Patent Nos. 5,080,839 and 5,094,609 disclose respectively a process for hydrating contact lenses and a chamber for hydrating contact lenses formed with a monomer or monomer mixtures disclosed in the foregoing patents. The process disclosed in these patents significantly reduces the thruput time by hydrating the lens and releasing the lens from the mold cavity with the deionized water and a small amount of surfactant without any salts, so that the time consuming ionic neutralization of the polymer from which the lens blank is made does not occur during the hydration process. When deionized water is used, the final step of the process is to introduce buffered saline solution into the final package with the lens and then seal the lens within the package so that the final lens equilibrium (ionic neutralization, final hydration and final lens dimensioning) is accomplished in the package at room temperature or during sterilization.
- 25 [0005] U.S. Patent No. 4,961,820, also assigned to the assignee of the present invention, discloses a final package for a contact lens, wherein the package is formed from a transparent polypropylene blister and a foil laminate that is heat sealed thereto.
- 30 [0006] While U.S. Patents 5,080,839 and 5,094,609 contemplate that the entire hydration process and transfer to final packaging may take place in a fully automated fashion, and while the chamber and process described in the foregoing patents enabled automated handling of the lens during hydration, suitable automated equipment to prepare the lenses for inspection and to handle the lenses at high production rates to implement the methods thereof in a fully automated apparatus was not readily available or taught by the prior art.

**SUMMARY OF THE INVENTION**

- 35 [0007] Recent developments in the inspection of contact lenses produced in accordance with the foregoing methods has enabled automated lens inspection, as taught in EP-A-0 604 179.
- 40 [0008] Further, recent developments in the hydration and automated handling of wet contact lenses, co-pending contemporaneously filed case VTN-74 (see item 2 on the attached Concordance), has enabled automatic robotic handling of lenses during hydration, and prior to the inspection thereof by the automated lens inspection system.
- [0009] It is an object of the present invention to provide an automated apparatus for handling and preparing contact lenses for inspection. It is further an object of the present invention to provide an automated apparatus for handling and preparing contact lenses for inspection and packaging wherein the lenses are inspected and packaged in the same carrier.
- 45 [0010] It is further an object of the present invention to provide for transfer of the lens between carriers with degassed and deionized water to facilitate the inspection thereof in the automatic inspection means.
- [0011] It is further an object of the present invention to provide an improved method of inspecting molded contact lenses wherein the lenses are inspected in deionized and degassed water to minimize the formation of air bubbles which would create false negative automatic lens inspection data.
- 50 [0012] It is further an object of the present invention to provide an improved method for manufacturing soft contact lenses wherein the lenses are first molded in disposable contact mold frames, and then hydrated and inspected in degassed and deionized water, and then packaged in a saline solution to enable the time consuming ionic neutralization of the polymerized lens to occur in the final package. It is further an object of the present invention to provide the foregoing method of manufacturing with a consolidation step for removing defective lenses from the line of inspected lenses prior to packaging.
- 55 [0013] It is another object of the present invention to provide for inspection of the contact lens in degassed and

deionized water and to provide for the automatic removal of the deionized water following inspection thereof.

- [0014] While the invention is described with particular reference to molded contact lenses wherein the lens has been molded between a first and second mold half, as described in copending contemporaneously filed case VTN-92 (see item 18 on the attached Concordance, it is understood the present consolidation apparatus is equally suitable for the consolidation of lenses formed by lathe cutting wherein the hydrogel is maintained at a dry state while the desired optical surfaces are cut and polished. Further, the apparatus of the present invention may also be used in consolidating spin cast lenses which subject a liquid monomer to centrifugal force in a mold which has the same shape as the desired optical surfaces of the lens.

#### 10 BRIEF DESCRIPTION OF THE DRAWINGS

- [0015] The foregoing objects and advantages of the present invention for an automated apparatus and method for consolidating products for packaging may be more readily understood by one skilled in the art with reference being had to the following detailed description of the preferred embodiments, taken in conjunction with the accompanying drawings, wherein like elements are designated by identical reference numerals throughout the several views, and in which:

- Figure 1 is a diagrammatic and plan view of an apparatus which fills a package carrier with degassed deionized water, removes the molded contact lenses from the final hydration stage, and places the contact lenses in a specially configured inspection pallet for the automatic optical inspection thereof.
- 20 Figure 2 is an elevation view of the automated lens inspection system and the stations utilized in the handling of the lenses after hydration and prior to the automated lens inspection.
- Figure 3 is a plan view of the apparatus illustrated in Figure 2.
- Figure 4 is an elevation view of a consolidation buffer used in the present invention, and the packaging apparatus to which the consolidated product flow is transferred.
- 25 Figure 5 is a plan view of the apparatus illustrated in Figure 4 illustrating both a consolidation buffer and a packaging buffer arranged immediately prior to the packaging apparatus.
- Figure 6 is a plan view of an articulated robotic transfer head having an adjustable array of convex lens carriers positioned immediately above a hydration carrier having a plurality of contact lenses therein.
- Figure 7(a) is a cross-section and diagrammatic illustration of the transfer of a wet contact lens from the concave lens holding surface of a hydration carrier to the convex holding surface of the articulated robotic transfer head.
- 30 Figure 7(b) is a cross-section and diagrammatic illustration of a bubble blow off mechanism for removing air bubbles from the contact lenses that might otherwise create false negative automatic lens inspection results.
- Figure 8 is a diagrammatic and partially cross-section plan view of the articulated robotic transfer head in the expanded position, as viewed from above.
- 35 Figure 9 is a diagrammatic and partially cross-sectioned illustration of the articulated robotic transfer head in plan view in a closed position, as illustrated from below.
- Figure 10 is an isometric view of a contact lens carrier which serves as both an inspection carrier, and a portion of the final contact lens package.
- Figure 11 is an isometric view of an inspection carrier used to transport a plurality of the contact lens carriers illustrated in Figure 10 through the automated lens inspection system.
- 40 Figure 12 is a diagrammatic illustration illustrating the components of the deionized water degassing system of the present invention.
- Figure 13 is a detailed elevation view illustrating in section the degas unit used to degas the deionized water.
- Figure 14 is an elevation and side view of an apparatus used for filling package carriers with degassed and deionized water in accordance with the practice of the present invention.
- 45 Figure 15 is a partially cross-section elevation and end view of the apparatus illustrated in Figure 14.
- Figure 16 is a diagrammatic illustration of an individualized robotic handling device transporting contact lens carriers to a vacuum rail consolidation buffer used in the present invention.
- Figure 17 is a diagrammatic illustration illustrating in conceptual form a consolidation buffer used in the present invention.
- 50 Figure 18 is an elevation view of a vacuum rail consolidation buffer used in the present invention.
- Figure 19 is an enlarged plan view of the drive mechanism utilized in the vacuum rail consolidation mechanism of Figure 18.
- Figure 20 is a diagrammatic and partially cross-sectioned illustration of the apparatus used to fill the package carriers with saline solution in the final packaging of the present invention.
- 55 Figure 21 is a partially cross-section and diagrammatic elevation front view of a heat sealing head and pneumatic press used to hermetically seal the package carrier of the present invention.
- Figure 22 is a partially cross-sectioned elevational side view of the apparatus illustrated in Figure 21.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] The present invention was designed for and is particularly adapted for use in the post hydration processing section of an automated contact lens production facility. Contact lenses molded in an automated production line, such as that described in copending contemporaneously filed cases VTN-92, VTN-74, VTN-101 and VTN-102 (see items 18, 2, 21 and 22 on the attached Concordance). are particularly benefited by the present invention.

POST HYDRATION PROCESSING

10 [0017] The present invention envisions a multi-purpose disposable lens package carrier which transports a contact lens during inspection thereof, and serves as a portion of the final packaging after inspection.

[0018] A suitable package carrier 20 is illustrated in Figure 10 and is formed from injection molded or thermal formed plastic sheet material, such as polypropylene and includes a planar essentially rectangularly shaped base member 34 having an angularly depending wall portion 38 at one end thereof forming a first flange member and a pair of registration flanges 33(a), 33(b), one of which is visible in Figure 10, at the other end thereof which are used to align the package carrier for robotic handling. This package carrier is more fully described in copending application U.S.S.N. 995,607, the disclosure of which is incorporated here by reference thereto. Registration notches 31(a), (b) are provided on either side of the base 34 to cooperate with registration pins on various support pallets used in the processing and packaging operations to register the package carrier and lens for further handling or treatment. Offset from the center of the package is a cavity 36 integrally formed therein which is of an essentially semi-spherical configuration, generally in conformance with a curvilinear shape of a contact lens (not shown) which is adapted to be stored therein in a sealed condition while immersed in a suitable sterile aqueous solution in a manner similar to that described in U.S. Patent No. 4,691,820 to Martinez; which is assigned to the assignee of the present invention, the disclosure of which being incorporated herein by reference thereto. The height "h" of flange member 38 depending from the planar base member 34 is complimentary to the height or depth of cavity 36, and provides for self alignment of the package carrier in cooperation with depending flanges 33(a), (b) on specially configured pallet carriers, as will hereinafter be described. Depending flange 38 is also used in the final packaging of the product in cooperation with a plurality of generally "chevron-shaped" ridges 32, which will subsequently assist in supporting the cavity structure of an inverted and superimposed package carrier when said packages are to be cartoned for final distribution.

30 [0019] The cavity 36 also includes a plurality of tick marks 37 which are used to assist in holding a contact lens in the centered position in the cavity during the removal of deionized water at one of the post hydration processing stations. The package carrier is also equipped with an annular flange 39 which is used for heat sealing a foil laminate cover in order to provide a hermetic seal for the contact lens during final distribution. A cut-out 35 is used to facilitate gripping the flange 38 and the package when the cover stock or foil laminate is removed by the consumer to use the lens.

35 [0020] Base member 34 also includes a smooth planar surface 34(a) to provide a suitable engagement zone for vacuum grippers on the upper side, and a vacuum rail on the lower side, which are used to transport the package carrier during various stages of the operation.

[0021] An inspection carrier for transporting the package carriers through the automated lens inspection system is illustrated in Figure 11. The inspection carrier 10 includes a first and second row 10(a), 10(b) of cavities 40 which receive the bowl 36 of the package carrier and provide an optical sight path for the automated lens inspection system. Each of the intermediate registration pins 41 engage a package carrier on either side, with the end registration pins 41(a) engaging a single package. These registration pins engage the registration notches 31(a), (b) in the package carriers and provide for precise registration of the package carrier in the longitudinal dimension of the inspection carrier while a pair of hard edges 42(a), 42(b) provide a reference point for the downwardly descending flanges 33(a), 33(b), which together with pins 41 register the carrier package against rotational skewing. The inspection pallet 10 is further provided with three registration openings 43 on either side of the pallet which are used to transport the pallet through the automatic lens inspection station and to lock the pallet in place during loading and unloading of the package carriers. The inspection pallet is further provided with a pair of grooves 44(a), 44(b) which provide a positive grip for an overhead transport mechanism that places and then removes the inspection pallet from the automatic lens inspection system. A pair of slanted faces 45 provide clearance for the downwardly descending flange member 38 of the package carrier 20.

50 [0022] As illustrated in Figure 3, an injection mold machine 30 is used to mold the polypropylene lens carriers 20 which serve a dual purpose in the invention concept. First, to provide a carrier for the inspection of the lens by the automated lens inspection system, and secondly, to provide a receptacle for the final packaging of the lens for distribution to end use consumers. These package carriers are molded in predetermined array, typically in a 4 X 4 cluster of sixteen package carriers per mold cycle, and removed from the injection mold by a robotic transfer means 60 having a rapidly reciprocating low mass transport carrier 62. The carrier 62 includes a hand member 64 having a plurality of vacuum gripper means thereon which are arranged to correspond to the array of mold cavities within the injection molding machine 30. Carrier 62 reciprocates along support member 66 and is rotatable from a vertical orientation as illustrated

in Figure 3, to a horizontal orientation necessary to place the packaged carriers into a secondary transfer shuttle 68. Secondary transfer shuttle 68 is used to transport a plurality, i.e. sixteen of the package carriers from a first receiving position 68(a) illustrated in Figure 3 to a second position 68(b) where the package carriers are picked up by a robotic handling device 50. Robotic handling device 50 is articulated, having first and second arms 51, 52 and a vertically reciprocating arm and hand (not shown) having a plurality of vacuum gripping means thereon which engage each of the package carriers transported by the transfer shuttle 68.

[0023] The package carriers 20 are then removed from the transfer shuttle 68 and placed on an inspection pallet 10 at a pallet loading station 11. In the preferred embodiment the package carriers are molded in a 4 X 4 array to maximize the efficiencies inherent in such an array for molding, which are transported in the inspection pallet 10 in a 2 X 8 array. When these two arrays are used, robotic handling device 50 makes two separate transfers, and transfers a 2 X 4 array in each transfer. The loaded pallet 10 is then moved by conveyor 12(a) to a deionized water injection station 16 wherein each of the package carriers transported on the inspection pallet are partially filled with degassed and deionized water. The inspection pallet is then transferred by a push conveyor 17 to a lens loading area 18 where it is batched with a second pallet to provide a contiguous loading area with thirty-two package carriers, each of which has been dosed with degassed and deionized water.

#### DEIONIZED WATER DEGAS

[0024] The present invention utilizes degassed and deionized water with a small amount of surfactant therein as an inspection media for the systems described in cases VTN-101 and VTN-102 referred to above.

[0025] When only deionized water is used in the package carrier bowl, friction or hydrophobic attraction between the contact lens and the surfaces of the carrier that form the recesses may occasionally prevent the lenses from moving or sliding completely into the desired, predetermined positions. For example, in one known process, contact lenses are formed from a liquid hydrogel monomer, which is polymerized in the presence of an inert diluent such as boric acid ester, as described in U.S. Patent No. 4,495,313. The inert diluent fills up the spaces in the hydrogel lens during polymerization, and the diluent is subsequently exchanged for deionized water during a hydration process.

[0026] After this hydration process is completed, small amounts of the acid groups may remain on the lens surface. When the lens is placed inside the recess of the lens carrier, these acid groups may cause the lens to stick to the surface of the bowl of the carrier. Without freedom of movement, the lens might not move completely into the desired predetermined position. When this happens and the lens is subsequently inspected using an automatic Lens Inspection System, the lens may be rejected for being outside the field of view, or may otherwise be erroneously identified as irregular or imperfect.

[0027] In pending contemporaneously filed case VTN-140 (see item 23 on the attached Concordance), a solution to this problem was described in which a small amount of surfactant was added to the deionized water. The surfactant reduces the friction and retards the hydrophobic attraction between the lens and the surface of the holder forming the recess, helping to insure that the lens is pulled into the desired, predetermined position.

[0028] Any suitable surfactant may be used in the practice of the invention. For example, the surfactant may be polyoxyethylene 20 sorbitan monooleate, more commonly known as Polysorbate 80, or tween 80 or tween 80k<sup>c</sup>. It has been found that the addition of tween 80 at a concentration as low as 25 parts per million parts of solution allows the lens to move in package carrier 20 without sticking. Larger amounts of the surfactant may be used, and for example, the weight percent concentration of the surfactant in the solution may be between 5.0% and 0.01%. The surfactant may be mixed in any suitable liquid carrier, such as deionized water, to form the desired solution.

[0029] Preferably, the surfactant concentration in solution is in the lower end of the above-given range, and for example, the surfactant concentration may be below fifty parts per million parts of deionized water. Using the surfactant at this lower concentration helps to avoid, or to reduce, any foaming or bubbling of the surfactant in the solution and helps to reduce subsequently the surfactant concentration below a predetermined level.

[0030] Degassed water is preferred to prevent the formation of air or gas bubbles when the water emerges from a pumped high pressure fluid line into a low pressure (atmospheric) environment. When deionized water which has not been degassed is used, small air bubbles may form in the package before the lens is transferred or, on the contact lens when it is transferred to the package carrier. These bubbles are formed from dissolved gasses in the deionized water which are "seeded" by the lens or a small irregularity in the package carrier surface.

[0031] The apparatus for degassing the deionized water is illustrated in Figures 12 and 13. Figure 12 is a diagrammatic illustration of the degas module, while Figure 13 is a detailed elevation view as the degas unit. Deionized water is provided through input line 112 from a deionized water source, which may be the same source as that used for hydration. If drawn from a container, a optional pump 114 may be provided.

[0032] The deionized water then passes through filter 118 in order to remove extraneous particulate contaminants that may be present in the water.

[0033] The deionized water is then provided to the inlet 121 of the degas unit 122. Within the degas unit, the deion-

ized water is divided among a plurality of tubes 124, and then recombined into a degas unit discharge 126. The degas unit is operated under a low ambient pressure typically from 4 to 25 torr which is provided by vacuum pump 128. This vacuum pump is attached to the degas unit 122 by line 130 and discharges the excess air from the degas unit by way of line 132.

5 [0034] After the deionized water exits degas unit 122 by discharge line 126, it passes through line 136(a),(b) into manifolds 138(a),(b). The manifolds are used as a common source to supply a plurality of precision dose pumps 140 that fill individual contact lens package carriers at the dosing station 16 and the robotic transfer array 102 mounted on robotic transfer device 100. The pumps 140 used to pump the degassed and deionized water to manifold 138 are F.M.I. pumps (Fluid Metering, Inc., Oyster Bay, New York) that are mounted to drive units manufactured by Oyster Bay Pump  
10 Works, Inc., Oyster Bay, New York. These pumps provide precision doses of degassed and deionized water solution to pre-wet the package surface thereby reducing bubble formation and lens sticking, to avoid overfilling (i.e. water on the sealing area of the package) and to promote the proper water level for the inspection system.

[0035] Turning now to Figure 13, there is shown in greater detail the monomer degas unit 122. The degas unit is comprised of a pressure boundary consisting of an outer cylindrical wall 144, a top plate 146 and a bottom plate 148.  
15 Contained within the cylindrical side wall 144 is a port 130, which is connected to vacuum pump 128 (not shown).

[0036] Top plate 146 and bottom plate 148 are attached to the cylindrical side walls 144 by use of flanges 150 compressed upon O-rings 152 and 154 found on the bottom and top plates, respectively. Compression of the O-rings and attachments of plates 146 and 148 to flanges 150 is accomplished by bolts 156 that attach the plates to the flanges.

[0037] Passing through top plate 146 is the water inlet line 121. This inlet line passes through the top plate 146, divides within the chamber 122 by means of a "Y" connector into two or more lines 157 of equal length. Lines 157 are preferably of equal length in order to provide equal back pressure resulting in equal flow through both lines to two separate headers 158. Each of these headers is connected to ten silicon tubes 160 which are permeable to gas. The tubes 160 are arranged in a 3 - 4 - 3 offset array, 0.300 spacing center-to-center. The flow through the tubes is from the bottom up in order to fill the tubes and not entrain voids in the liquid. A static mixer 170 is provided in each of the tubes 160 to increase the efficiency of mass transfer. These static mixtures are made of Delrin, 1/4 inch in diameter and 6 inches long, as produced by Koflo, Inc. of Carrie, Ill.  
20  
25

[0038] The internal structure of the degas unit stands off the bottom of chamber with stainless steel pipe 167 supporting Delrin blocks 168 at the desired separation and these blocks, in turn, support manifolds 158 and 162 containing therebetween extended gas permeable tubes 160. Alternately the degas unit may be suspended from top flange 146.

30 [0039] During its time of residence in the silicon tube 160 in the low pressure degas chamber 144, dissolved gasses migrate out of the deionized water through tube wall 160, drawn out by the vacuum pump through chamber outlet 130. As the water approaches the top of the chamber it is essentially free of dissolved gasses.

[0040] The silicon tubes near the top of the chamber are connected to second headers 162 which combine silicon tubes 160 back into common tubes 164. These tubes may also be made of a silicon, or may be made of an impervious material. They are of the same length in order to avoid pressure differences which could result in flow imbalances. Tubes 164 are then connected in a "Y" fashion to provide a single degas unit outlet 26.  
35

[0041] The preferred material for the gas permeable tubing is STHT tubing produced by Sanitech Inc. of Andover, NJ from Q74780 medical grade silicone rubber manufactured by Dow Corning of Midland, MI.

40 [0042] The apparatus is arranged so that each set of tubes 124 contains ten tubes, each 1/4 inch inner diameter with a wall thickness of 1/32 inch, having a 80 durometer hardness.

#### PRE- INSPECTION PREPARATION

45 [0043] The apparatus of the present invention that prepares the contact lenses for inspection and subsequent packaging is best illustrated in Figure 1 which is an enlarged view of a portion of the apparatus illustrated in Figures 2 and 3 with particular emphasis on the transition between the hydration line and the post-hydration line of the present invention.

[0044] The present invention is particularly adapted for use in conjunction with the invention disclosed in case VTN-74 referred to above.

50 [0045] As illustrated in Figure 1, a second hydration carrier 860 having a top chamber plate mounted thereon is advanced into the separation station 120 for removal of the top chamber plate and transferred to the return conveyor 141. The hydration base emerges from the separation station 120 to the position illustrated at 860(a) having a plurality, e.g., thirty-two contact lenses 8 therein, with a single lens carried in each of the convex lens carriers attached thereto. An articulated robotic transfer device 100 having an adjustable 4 X 8 array 102 of convex lens carriers then positions  
55 the array over the second hydration carrier 860(a) as illustrated in Figures 6 and 7(a).

[0046] As illustrated in Figure 7(a), a single contact lens 8 is carried within the concave lens carrier 861 and is positioned immediately below a convex lens carrier element 104 mounted on the 4 X 8 array 102. The concave carrier 861 includes at least one port 862 for introducing a fluid between the surface of the concave lens carrier element, and the



lens 8. The fluid is supplied through a channel 866 cut into the lower side of upper plate member 867, which communicates with a fluid manifold and a plurality of upstanding fluid connectors 863 which extend above the surface of the concave lens carrier elements 861 as best illustrated in Figure 6. The fluid connectors 863 are adapted to engage fluid couplings 864 formed on the underside of the 4 X 8 array 102. Each of these couplings is connected to a fluid conduit 874 which supplies a transfer fluid for the transfer of the contact lens 8 from the concave lens holding means 861 to the convex lens holding means 104.

[0047] In the embodiment illustrated in Figure 6, and in particular for the transfer of contact lenses from the hydration carrier 860 to the robotic array 102, a pneumatic fluid transfer is desired, and thus conduits 874 provide pressurized air to the coupling members 864 which in turn supply the pressurized air to fluid coupling 863 to the channel passageway 866, and the port 862.

[0048] As illustrated in Figure 7(a), the contact lens 8 is still wet having recently been hydrated and flushed in the hydration station. Further, the lens has been hydrated with deionized water having a small amount of surfactant therein which may be advantageously employed to promote the handling of the wet contact lens by centering the lens within the concave surface of lens holding means 861. When the air pressure lines 874 are actuated, a puff of air will emerge through the port 862 and lift the contact lens upwardly from the surface of the concave carrier and into engagement with the convex lens carrier element 104. While the lens will adhere to element 104 with or without the surfactant, the surfactant wets the surface of the convex carrier element 104 and promotes adhesion thereto by virtue of the surface tension of the deionized water and the surrounding atmospheric pressure. In the transfer, it is desirable to position each of the convex carrier elements 104 within 1.5 mm of the lens to ensure a direct and precise transfer.

[0049] After transfer of the lens 8 to the convex element 104, the robotic transfer device then moves the array of lenses to a "bubble blow off" station 70 illustrated in Figure 3. In Figure 1, the 4 X 8 array 102 overlies station 70.

[0050] The bubble blow off station 70 includes a manifold arrangement similar to manifold 860 with a plurality of cup members 106, each of which has a concave surface 108 of approximately the same configuration as the convex surface of the second lens carrier element 104. While a concave surface such as surface 108 has been found to be desirable, a single jet device will also provide the same function. The concave surface 108 also includes at least one port 110 defined therein for admission of pressurized fluid through a central passageway 109 formed in the cup member. The use of a small amount of surfactant in the deionized water promotes the transfer of the lens from first to second carrier elements, but also enables the formation of small air bubbles 105 in the layer of deionized water which coats the contact lens 8. By subjecting the lens to a jet of pressurized fluid, the small bubbles 105 are migrated outwardly and dissipated prior to the transfer of the lens to the inspection carrier. Removal of the air bubbles is desirable to avoid false negative reports from the automatic lens inspection system which is used to inspect the lenses. While pressurized air is used in the preferred embodiment of the invention, deionized water is also suitable.

#### PACKAGE CARRIER DOSING

[0051] As was described earlier with respect to Figures 12 and 13, deionized water is degassed in a degas unit 122 and distributed by a plurality of precision dosing pumps 140 to a deionized water dosing station 16, which is more fully illustrated in Figures 14 and 15. As illustrated in Figure 15, a rubber belt conveyor 12(a) having a pair of belts carries the inspection carrier 10 from the package carrier loading area 11 (illustrated in Figure 3) to the deionized water dosing station 16. A pneumatic stop 170 having a paul 171 is used to hold a series of inspection carriers 10 upstream of the dosing station 16. When a new inspection carrier 10 is to be loaded, the pneumatic stop mechanism 170 retracts paul 171, allowing the inspection carrier 10 to be carried into the dosing station on conveyor 12(a). A separate set of jaws mounted on a pneumatic locking mechanism 172 (illustrated in Figure 1) engage the inspection pallet 10 and hold it securely in position for package dosing. A plurality of dosing nozzles 174 are mounted on a horizontal reciprocating beam support member 176 and are connected to the F.M.I. pumps 140 by virtue of a plurality of tubing members 178 with a separate pump for each nozzle. Each of the nozzle members 174 terminates in a sixteen gauge teflon needle having an ID of .045 inches -.048 inches which is suspended directly above the package carriers 20, and more particularly, above the bowl member 36. In operation, a pneumatic cylinder 180 which is fixably secured to support frames 181 and 182 reciprocates carriage member 184, vertical supports 185, 186 and the horizontal mounting beam 176 to enable the teflon needle tips to be lowered into the recessed bowl 36 of the package carriers 20. The tips are reciprocated downwardly, and approximately 600 microliters of degassed and deionized water is injected therethrough to partially fill the bowl 36. After the bowls are filled with the desired dosage, pneumatic cylinder 180 is actuated and the reciprocal support beam 176 is raised to lift the teflon needles free of the package carriers 20. The use of a reciprocating dosing needle eliminates agitation or splashing in the dosing of the degassed and deionized water. Undue agitation or splashing may also lead to the enlargement of air and the formation of air bubbles which may generate a false negative inspection signal. The inspection carrier 10 is then advanced out of the dosing station 16 to the end of conveyor 12(a) where it engages a push conveyor 17, driven by a servo motor, which pushes the inspection carrier 10 across a stainless steel platform 190 to the lens loading area 18. The lens loading area 18 is specifically designed to accommo-

date two inspection pallets 10 and provide a ganged array of thirty-two package carriers for receipt of thirty-two individual contact lenses. When these two inspection pallets 10 are in the lens transfer position 18, tapered pins (not shown) engage registration cavities on the pallets (2 per pallet) and provide precise positioning during lens transfer.

[0052] While 2 X 8 and 4 X 8 arrays have been utilized in the post-hydration processing section of the present invention, it is understood that a variety of array configurations could be utilized in the practice of the present invention.

[0053] The 4 X 8 array of the hydration carrier 860 is different than the 4 X 8 array of package carriers in the lens loading area 18. The second 4 X 8 array 102 mounted on robotic transfer means 100 is adjustable to accommodate the first 4 X 8 array in the second hydration carrier 860 which has 30 mm centers between lenses, and the "bubble blow off" station 70, and then expands to 30 X 50 mm centers, which is the dimension of the third 4 X 8 array at the lens loading area 18 as will be hereinafter described with respect to Figures 8 and 9.

[0054] As illustrated in Figures 8 and 9, the 4 X 8 array 102 is illustrated in an expanded configuration in Figure 8, and a collapsed configuration in Figure 9. The array 102 includes thirty-two convex lens carrier elements 104 as previously described with respect to Figures 6 and 7. Along the center line of the array are four fluid coupling members 864 which engage conduits 863 on the second hydration carriers 860. The array is made of four separate lines or elements 190-193, each of which carries eight convex carriers 104. Each of the linear members 190-193 is mounted for reciprocation along internal guide rods 194 and 195 as more fully illustrated in Figure 8. A pneumatic chuck 196, 197 is positioned on either side of the array, and upon actuation draws the outer most elements 190, 193 outwardly as illustrated in Figure 8 along the guide rods 194, 195. Each of the outer most arrays 190, 193 also carries a pair of internal sliding stops, one of which is illustrated in Figure 8 at 198 which draw the inner most linear elements 191 and 192 outwardly, with linear element 190 drawing linear 191, and linear element 193 drawing linear element 192. Compression springs 199 also assist in separating the linear elements of the array.

[0055] It should also be noted that the array 102 is rotatable about turntable 103 to provide for the proper orientation of the array when transferring lenses from the hydration station to the lens loading area. The robotic transfer device 100 also includes first and second articulated arms 107, 109 and a vertical arm 105 having a reciprocal servo motor 106 (see Figure 2) mounted therein which enables complete three dimensional movement of the 4 X 8 array between each of the various transfer points which the robotic transfer device serves. As illustrated in Figure 2, the weight of the 102 is substantially offset by a preload spring 108 which carries much of the weight of arm 105 and array 102, thereby reducing the load on vertical servo motor 106.

[0056] Each of the convex lens carrier elements 104 also includes an interior conduit 110 terminating in at least one port 111 which may be used to introduce a fluid between the convex lens carrier element and the contact lens 8. When the array 102 is positioned over the plurality of lens carrier elements at the lens loading area 18, the array elements 191-193 are spread to align each of the convex lens carrier elements 104 with an associated package carrier immediately therebelow, and a small amount, nominally 300  $\mu$ l, of degassed and deionized water is pumped by precision dosing pumps 140 through conduit 110 to transfer the contact lens 8 from the convex carrier 104 to the bowl 36 of the package carrier 20. Again, the use of degassed deionized water enables transfer of the lens without risking the development of small air bubbles from dissolved gasses in the deionized water that might otherwise "seed" on the contact lens 8. After the lenses 8 have been transferred to the package carrier 20, the 4 X 8 array 102 is collapsed by actuating air chucks 196, 197, to return the array to a configuration that matches the configuration of the hydration carrier 860.

[0057] When both pair of inspection carriers 10 have been loaded at the lens loading area 18, a second servo motor actuated push arm 18(a) transfers both pallets from the lens loading area to a staging area 19(a) as illustrated in Figure 1. At staging area 19(a), an overhead double axis transport carrier 21 singulates one of the inspection carriers and picks up a single pallet 10 for transfer to the automatic lens inspection station 15 as illustrated in Figures 1 and 3. The overhead transport 21 is a double axis Hauser Transport Mechanism, and is used to isolate the automatic lens inspection system 15 from the remainder of the post-hydration line. By utilizing a double axis transport mechanism, the pallet 10 can be gently conveyed to the automatic lens inspection system, and thereby avoid any vibration that might otherwise impair the inspection results. After the first pallet 10 has been lifted from the staging area 19(a), a push arm 19 moves the remaining pallet 10(b) into the staging area 19(a) for transfer by the double axis transport mechanism 21 to the Automatic Lens Inspection System 15, as illustrated in Figures 2 and 3.

[0058] In the Automatic Lens Inspection System illustrated in Figure 3, as the inspection carriers are conveyed through the system by conveyors 15(b) a light beam or pulse is directed from sources 15(c) and through a lens to be directed and focused on a screen (not shown) to produce an image of the lens therebelow. Preferably, the screen includes an array of pixels, each of which generates a respective one electric signal proportional to, or representing, the intensity of the light incident on the pixel. Those electric signals are then processed to determine if the lens is acceptable for consumer use. Any suitable procedure may be used to process or analyze the electric signals from the pixel array; and, for instance, suitable procedures are disclosed in EP-A-0 604 179 and EP-A-0 604 174. As illustrated in Figures 3, separate systems are utilized to inspect the sixteen lenses carried in inspection carrier 10. After completing the test for the last bank of lenses, the Automatic Lens Inspection System sends a datablock with the vision inspection results to the programmable logic controller used to consolidate the lenses for packaging.



[0059] After the lenses have been inspected by the automatic lens inspection system 15, the inspection pallet is lifted by the second double axis overhead transport 22 and placed on conveyor 12(b) for transport to the deionized water removal station 24. The deionized water is removed by a specially configured nozzle, as described in EP-A-0 618 063. As described earlier, the deionized water is used to center the lens within the package carrier during the inspection process, but is removed prior to packaging, to enable a precise dosing of a buffered saline solution in the final package, as will hereinafter be described in detail.

[0060] After removal of the deionized water, the lenses, package carriers and inspection pallet are transported to the package removal pick point 25 which clamps the inspection pallet 10 to enable a second robotic transfer device 200 to remove the package carriers and lenses therefrom.

#### THE CONSOLIDATION BUFFER

[0061] As illustrated in Figure 2, 3 and 16, the second robotic transfer device 200 is positioned adjacent conveyors 12, 13 and has mounted thereon a 2 X 8 array 202 of sixteen independently actuatable vacuum gripping means. Inspection pallet 10(b) is conveyed along conveyor 12 to a predetermined product pick point 25, as illustrated in Figure 3 and the 2 X 8 array 202 is positioned thereabove to remove each of the sixteen products from the inspection carrier 10(b), immediately following the removal of the deionized water as previously described with respect to Figure 3.

[0062] In the practice of the present invention, a programmable logic controller is used to control the various elements of the present invention and receives a vision datablock from the automated inspection system having a flag set for each of the products in inspection carrier 10(b) that is out of product specification.

[0063] After the products 20 have been removed from the inspection carrier 10(b), the robotic transfer device 200 positions the 2 X 8 array over conveyor belt 14 and selectively discharges the out of spec products. Those products are then removed by conveyor 14 for subsequent destruction or recycling.

[0064] The robotic device 200 then places the remaining products on a vacuum consolidation buffer 230 as indicated at 230(c). The vacuum consolidation buffer of the present invention will be described with respect to Figures 16 - 19 in which 230(a),(b) diagrammatically represent a pair of elongated vacuum rails defined by housing members 231(a),(b) which enclose vacuum plenums 242(a),(b) and which define a plurality of vacuum slits 244(a),(b).

[0065] The product array as deposited at 230(c) includes gaps or random variations in the product flow resulting from the removal of the defective products from the serial product flow. The vacuum consolidation buffer 230 includes a pair of pneumatic product followers 232,234 which are used to consolidate the product group 230(c) with the other already consolidated products on consolidation rail 230.

[0066] Each of the pneumatic followers 232,234 is independently advanced in the direction of arrow C until each product stream is consolidated, thereby eliminating gaps or voids in the product stream which result from the inspection and rejection of defective products. For example, as product 20(f) encounters product 20(g), the entire stream of product driven by product follower 232 will advance and trigger an optical sensor 236, which generates a control signal for the programmable logic controller to de-energize product follower 232 and return the follower to the initial start position. Likewise, optical sensor 238 generates a similar return signal for product follower 234 when the second product stream has been consolidated. After consolidation of the product, a separate indexing mechanism 240 returns both product streams in the direction of arrow D to a predetermined registration point for subsequent robotic handling. In the present invention, the consolidation buffer 230 includes a pair of vacuum rails 230(a),230(b) which lightly grip the product to permit sliding movement of the product along the rails in response to product followers 232,234, but which will prevent "shingling" or overlapping of adjacent edges of product packages which might otherwise occur during consolidation.

[0067] As illustrated in Figure 18 and 19, the product followers 232,234 are mounted on pneumatically driven carriages, one of which is visible in elevation view of Figure 18 and two of which are visible in plan view in Figure 19. The carriage includes a rodless cylinder 250 mounted for reciprocation on pneumatic cylinder 252 and guided by guide rod 251. The product followers 232,234 are each mounted to the respective carriages by virtue of a pair of parallel rods 254(a),(b),254(c),(d) which are mounted for reciprocation within housings 250(a),(b).

[0068] The product string is advanced in the direction of arrow C until they trigger one or both of the optical sensors 236,238. When the optical sensors are triggered, the programmable logic controller reverses the pneumatic bias on rodless cylinder 252 and the carriage 250 is then retracted to its original position as illustrated in Figure 18. In addition, a proximity sensor (not shown) at the end of the stroke will also generate a signal to reverse the direction of carriage 250 if no product has been deposited on either of the consolidation buffer rail 230(a),(b).

[0069] After the respective product streams have been advanced from position 230(c) to actuate the optical sensor 238, a product indexing mechanism 240 is actuated to return the product string to a predetermined location for registration with the third robotic transfer device 300 which transfers product onto the packaging indexing table 400. The product indexing mechanism 240 includes a pneumatic cylinder 264 which actuates a push rod 266 and a pusher plate 262 into engagement with the product stream on the vacuum consolidation rails. The product pusher arm 262 then returns the leading edge of the first package carrier on each vacuum rail to a predetermined index position for registra-

tion with the 2 X 5 array 302 mounted on the packaging robotic transfer device 300.

### PACKAGING TRANSFER

5 [0070] A package feed robotic handling device 300 is positioned between the consolidation buffer 230 and a packaging station 400, and is equipped with an array 302 which contains ten vacuum gripping means arranged in a 2 X 5 matrix. The 2 X 5 array 302 is first positioned over product group 20(d) and the vacuum gripping means is actuated to withdraw the first ten products from the vacuum consolidation buffer 230. The packaging robotic handling device 300 then positions the 2 X 5 array and product group 20(d) over position 1 on the packaging indexing table 400, and drops  
10 the array of products onto support pallet 410 mounted on the packaging indexing table 400.

[0071] During packaging, the package indexing turntable 400 rotates support pallets 410 from position to position to enable the products to undergo subsequent packaging steps. In the event there is a malfunction or delay in the operation of the package indexing turntable 400, the incoming product arriving on consolidation buffer 230 may be temporarily stored in a buffer area 308 which has a plurality of buffer pallets 310 positioned therein. When the packaging index  
15 table 400 resumes operation, the package robotic handling device 300 will then transfer products in the 2 X 5 arrays from the buffer pallets 310 to the support pallets 410 on a first-in, first-out basis.

[0072] If the product being handled is time sensitive, the programmable logic controller can generate a time stamp to be placed with each product array as it is transferred from any given processing station to any subsequent processing station. Thus, a time stamp may be placed on the product when inspected, or when transferred to the buffer area 308.  
20 If the product is transferred to buffer 308, the X,Y coordinates of the array are also stored with the time stamp. If the time sensitive allotment expires before packaging index table 400 has resumed operation, the packaging robotic handling device 300 will then discard expired time sensitive product, and will transfer only product meeting the time sensitive criteria to the support pallet 410. Likewise, if a problem in the production line results in an inordinate number of products being rejected, so that less than five products are available on either consolidation string 230(a),(b) at position 20(d)  
25 then the robotic handling device 200 will transfer product as necessary to balance product streams on both sides of the packaging consolidation buffer 230, and thereby enable removal of product as a 2 X 5 product array. Buffer area 308 will accommodate approximately fifty pallets for intermediate storage, or approximately 10 minutes of product stream in the event the packaging operation is temporarily interrupted for resupply, maintenance or adjustments.

### PACKAGING

[0073] After the 2 X 5 array of package carriers has been deposited on support pallet 410, the pallet is rotated to position 412 where optical sensors verify that a package has been loaded at each position and that the packages are correctly aligned on the pallet. Indexing turntable 400 is then rotated again to station 414 wherein each of the individual  
35 package carriers are dosed with approximately 950 microliter of a saline solution.

[0074] Station 414 is illustrated in elevation view in Figure 20, wherein five dosing nozzles 415 are positioned above five package carriers 20. Dosing nozzles 415 are mounted on a cantilever support arm 450 to thereby suspend the nozzle over the rotating table 400. A plurality of saline tubes 417 carry a buffered saline solution, from a plurality of precision dosing pumps, similar to the F.M.I. pumps used to pump the deionized water to dosing station 16 depicted in Figures 1  
40 and 3.

[0075] The use of deionized water in the hydration and inspection steps significantly speeds the production line as a whole since the time consuming ionic neutralization of the polymer from which the lenses are made does not occur until after the inspection process. When deionized water is used for hydration and inspection, the final step of the process is to introduce buffered saline solution into the final package with the lens and then seal the lens within the package  
45 so that final lens equilibration (ionic neutralization, final hydration and final lens dimensioning) is accomplished in the package at room temperature or during sterilization after the lens has been packaged and sealed.

[0076] It has been determined empirically that it is desirable that soft contact lenses produced in accordance with the present invention be exposed to atmosphere for no more than sixty minutes between the removal of the deionized water at station 24 (illustrated in Figure 3) and the dosing of the saline solution at station 414 in Figure 5. The programmable logic controller which previously received the inspection results from the automated lens inspection system and correlated those results to the individual lenses, also time stamps the individual lenses at the pick up point 25, immediately following the removal of the deionized water at station 24. This time stamp is transferred through consolidation and into the 2 X 5 array when removed by the packaging robotic transfer device 300. In the event the indexing turntable 400 is not operational, and the 2 X 5 array is stored in the buffer 308, then the X,Y coordinates of the 2 X 5 array are stored  
50 with the time stamp to enable the packaging robotic transfer device 300 to select "fresh" product, e.g. less than sixty minutes old, at the time the packaging dial 400 resumes operation. After operation is resumed, the robotic transfer device 300 will then dispose of the "expired" product, rather than transferring it to the packaging dial.

[0077] After saline dosing at station 414, the saline level is checked at station 415 and the support pallet is then

rotated under a final product check station 416 to a foil receiving station 418.

[0078] As described earlier, each group of 5 package carriers 20 receives a single laminated foil cover sheet which is heat sealed to the package carriers. The lens package is more fully-described in EP-A-0 604 177.

[0079] The laminated foil stock 432 is fed from a large indefinite spool through a tensioning device 434 to an ink jet printer 436 which prints the lot, batch and power number of the lenses to be packaged. The foil laminate is cut from an indefinite length product into two strips that are heat sealed to the 2 X 5 product array to provide two separate 1 X 5 product strips. The foil in between each of the package carriers is also partially severed, scored or perforated to enable the consumer to separate individual packages from the 1 X 5 array at the time the product is used. The partial scoring is done with a series of rolling blades 440(a)-(d) which are pneumatically biased into a drum 439. The foil is then split into two strips by a foil splitter blade 441 and the foil passes through a stationary gripper and sensing mechanism 442. A video camera 438 and a series of sensors at station 442 are used to provide precise alignment of the information printed by the ink jet printer 436, with the printing fields into which said printing is placed, and the alignment of the perforations or scores provided by rolling blades 439. An advancing gripper 434 is provided to draw a length of foil laminate corresponding to the 1 X 5 array and sever the strips with a rotating knife 444. At the completion of this cut, the advancing gripper 434 has advanced in the direction of arrow E in Figure 4 to place the 1 X 5 foil strips under vacuum gripping heads 418(a),(b). These vacuum gripping heads then reciprocate downwardly to grip the foil, lift it from the advancing and cutting station 434, and transfer the foil to the package indexing turntable 400 at the foil placement station 418.

[0080] The package indexing turntable 400 is then rotated again, and a heat seal mechanism 420 seals a single strip of foil to five separate package carriers in a single high temperature short cycle sealing operation.

[0081] As illustrated in Figures 21 and 22, the foil strips are heat sealed to the two 1 X 5 arrays of package carriers 20. A heated seal head 510, heated by a plurality of electric heaters 512 (two of which are illustrated in the embodiment of Figure 22) mounted in a heating plate 514. The heating plate 514 is secured to the back of the seal head 510, and is supported by a pneumatic cylinder or press 516 which presses the heated seal head 510 against the laminar foil sheet on the package carriers 20, which are supported by the pallet 410 such that the foil laminate and package carrier flanges are squeezed between the heated seal head and the pallet 410 as supported by the index turntable. The heated seal head is electrically heated, and the temperature thereof is measured by thermocouples 518 on each side of the seal head 510 to maintain the temperature at a high temperature, when compared to similar prior art arrangements. The temperature is maintained in a range from 210°-265°C, preferably at 258°C.

[0082] The heated seal head comprises a 2 x 5 array of cylindrical sealing elements 520, each of which secures one of the foil laminar sheets to each group of package carriers 20 with an annular seal 39 around the cavity 36 in the package carrier 20. The pneumatic cylinder is coupled to the heated seal head by a mount jack bolt 522 and cylindrical support struts 524. The support struts 524 are biased upwardly by springs 526, such that the heated seal head is raised and normally biased to the upper position illustrated in Figure 21, unless the pneumatic cylinder 516 forces it down for a sealing operation.

[0083] In operation, the back force generated by the pneumatic cylinder is measured by an in-line load cell 528, and a solid state timer is initiated when a force is reached of approximately 2700 newtons, which is approximately 75% of the peak force of approximately 3600 newtons. The solid state timer times a relatively short time period of approximately 0.4 to 0.48 seconds, after which the pressure in the pneumatic cylinder 516 is released. This approach, when compared with similar prior art approaches, is very hot, very hard and very short, which creates a seal which is both detachable and customer friendly.

[0084] The package indexing turntable 400 is preferably reinforced under the seventh angular position to withstand the heat sealing forces imparted thereto by the pneumatic cylinder 516. The indexing turntable 400 must be maintained in a substantially level position for the operations described herein. The pneumatic cylinder 516 at the seventh position applies a substantial force to the indexing turntable, and accordingly to maintain the turntable level, an approximately 2½ x 3½ inch support block 530 of a durable plastic material, similar to Teflon®, is placed on top a central support 532 and surrounding supports 534 positioned beneath the pneumatic press. The support block 530 is in constant contact with the indexing turntable 400 to ensure that the deflection of the indexing turntable 400 under the pneumatic cylinder 516 is minimal. Alternatively, a pneumatically actuable movable support could be positioned in contact with the bottom of the indexing turntable prior to operation of the pneumatic cylinder driving the heated seal head, and be repositioned out of contact with the bottom of the table after operation of the pneumatic cylinder.

[0085] The package indexing turntable 400 is then rotated to position 422 where a reciprocating transfer head 446 removes the sealed product from the indexing turntable 400 and transports it in the direction of arrow F for sterilization and cartoning.

[0086] While the invention has been particularly shown and described with respect to the preferred embodiments thereof, it will be understood by those skilled in the art that the foregoing, and other changes in form and details, may be made therein without departing from the spirit and scope of the invention, which is limited only by the scope of the following claims.

**Concordance of Johnson & Johnson Vision Products  
Applications Filed on 9th June 1995**

	<b>J&amp;J Ref.</b>	<b>Spec Ref.</b>	<b>C&amp;R Ref.</b>	<b>Priority Appln. No.</b>	
5	1.	VTN-73	8997.KLK	P13914EP	USSN 257802
		Low oxygen molding of soft contact lenses.			
10	2.	VTN-74	8998.KLK	P13913EP	USSN 258556
		Automated method and apparatus for hydrating soft contact lenses.			
	3.	VTN-75	8999.WCR	P13909EP	USSN 257801
		Laser demolding apparatus and method.			
15	4.	VTN-76	9000.WCR	P13908EP	USSN 257794
		Molding arrangement to achieve short mold cycle time.			
	5.	VTN-77	9001-III.SF9	P13907EP	USSN 257786
		Contact lens production line pallet system.			
20	6.	VTN-78	9002.JSS	P13910EP	USSN 258267
		Apparatus for removing and transporting articles from molds.			
	7.	VTN-79	9003-DTB	P13947EP	USSN 257785
		Mold halves and molding assembly for making contact lenses.			
25	8.	VTN-80	9004.KLK	P13950EP	USSN 258264
		Method and apparatus for contact lens mold filling and assembly.			
30	9.	VTN-81	9005-KLK	P13949EP	USSN 257791
		Automated apparatus and method for consolidating products for packaging.			
	10.	VTN-82	9006.SF9	P13948EP	USSN 258265
		Mold separation method and apparatus.			
35	11.	VTN-83	9007.KLK	P13945EP	USSN 257792
		Mold clamping and precure of a polymerizable hydrogel.			
	12.	VTN-84	9008-LP	P13946EP	USSN 257871
		Method and apparatus for demolding ophthalmic contact lenses.			
40	13.	VTN-85	9009-LP	P13993EP	USSN 258263
		Method and apparatus for applying a surfactant to mold surfaces.			
45	14.	VTN-86	9010-KLK	P13995EP	USSN 258557
		Automated apparatus and method for preparing contact lenses for inspection and packaging.			
	15.	VTN-87	9011-DTB	P13994EP	USSN 257799
		Ultraviolet cycling oven for polymerization of contact lenses.			
50	16.	VTN-88	9012-LP	P13997EP	USSN 257795
		Printed label structure for packaging arrangements.			

55

17. VTN-91 9015.SF8 P13998EP USSN 257800  
Computer system for quality control correlations.
- 5 18. VTN-92 9016.KLK P13996EP USSN 258654  
Consolidated contact lens molding.
19. VTN-93 9017.WCR P13999EP USSN 257787  
Packaging arrangement.
- 10 20. VTN-96 9166-II.SF6 P14005EP USSN 257790  
Production line tracking and quality control system.
21. VTN-101 9292.JSS P14009EP USSN 257857  
Lens inspection system and method.
- 15 22. VTN-102 9293.JSS P14007EP USSN 258340  
System and method for inspecting lenses.
23. VTN-140 9119.JSS P14008EP USSN 258266  
A method of positioning ophthalmic lenses.
- 20 24. VTN-150 9167.SF5 P14006EP USSN 257793  
Interactive control system for packaging control.
25. VTN-151 9168-LP P14003EP USSN 257789  
Apparatus and method for preparing printing labels.
- 25 26. VTN-152 9169-LP P14004EP USSN 257788  
Apparatus and method for sterilization and secondary  
packaging.

### Claims

1. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication  
35 facility, said apparatus comprising:
- (a) an inspection pallet for transporting a plurality of package carriers, each of said carriers adapted to receive  
a contact lens for inspection thereof;
- 40 (b) an automatic lens inspection station for optically inspecting a plurality of contact lenses in said inspection  
pallet and generating a signal for each defective lens;
- (c) an articulated robotic transfer device for periodically transferring a first predetermined number of individual  
package carriers inspection pallet to an intermediate consolidation buffer and depositing said packages on  
said consolidation buffer;
- 45 (d) a controller for tracking and identifying each individual contact lens conveyed from said inspection station  
to said consolidation buffer, said control means including means for storing the said signals identifying individ-  
ual contact lenses determined to be defective and generating a signal to cause said articulated robotic transfer  
device to discard any individual contact lens identified by said control means as being defective prior to the  
transfer to said consolidation buffer; and
- 50 (e) second robotic transfer device for periodically transferring a second predetermined amount of individual  
package carriers from said consolidation buffer to a packaging station.
2. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication  
facility, as claimed in Claim 1, wherein said consolidation buffer consolidates random variations in a flow of individ-  
ual package carriers to provide said second predetermined amount for said second robotic transfer device.
- 55 3. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication  
facility, as claimed in Claim 1, wherein said control means further includes means for determining whether said  
packaging station is available to receive said second predetermined amount of packages at said every period, said

control means further enabling said second robotic means to transfer said second predetermined amount of packages to an intermediate storage means when it is determined that said second station is not available to receive said second predetermined amount of packages in any one period.

- 5 4. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication facility, as claimed in Claim 1, wherein said control means enables said second robotic transfer device to retrieve said second predetermined amount of packages from said intermediate storage means and transfer said packages to said packaging station as soon as said packaging station is available to receive said package carriers.
- 10 5. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication facility, as claimed in Claim 4, wherein said control means further includes timing means for generating first time stamp data for each identified package carrier of said first predetermined amount of package carriers prior to transferring said first predetermined amount from said first station.
- 15 6. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication facility, as claimed in Claim 1, wherein said predetermined amount of package carriers includes an X,Y array of carriers, and said consolidation buffer includes at least X number of individual buffers.
- 20 7. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication facility, as claimed in Claim 6, wherein said control means stores a status for each of said X number of individual buffers, including a count for each addition of package carriers, and a count for each second predetermined amount transferred to said packaging station.
- 25 8. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication facility, as claimed in Claim 7, wherein said articulated robotic transfer device includes an array of independently actuable vacuum gripping means for gripping said package carriers.
- 30 9. An automated apparatus for automatically inspecting and packaging contact lenses in a contact lens fabrication facility, as claimed in Claim 8, wherein said articulated robotic transfer device will transfer package carriers between individual buffers to ensure said X,Y array of package carriers for said second robotic transfer device.
10. A method of inspecting and packaging molded contact lenses in an automated production line, said method comprising:
  - 35 (a) partially filling a package carrier with deionized water having a small amount of surfactant therein;
  - (b) depositing a contact lens to be inspected in said package carrier and inspecting said lens in said carrier;
  - (c) automatically removing said deionized water from said package carrier after said inspection, and then partially filling said package carrier with a buffered saline solution;
  - 40 (d) sealing said lens and said buffered saline solution in said package carrier for consumer usage.
11. A method of inspecting and packaging molded contact lenses as claimed in claim 10, said method comprising the additional step of degassing said deionized water prior to said step of partially filling said inspection carrier.
- 45 12. A method of inspecting and packaging molded contact lenses as claimed in claim 10, said method comprising the additional step of removing residual air bubbles from said contact lens before depositing the lens in said package carrier.
13. A method of inspecting and packaging molded contact lenses as claimed in claim 10, said method comprising the additional step of molding said package carriers in said automated production line, said line also including separate stations for said filling, depositing, inspecting and sealing steps.
- 50 14. A method of inspecting and packaging molded contact lenses as claimed in claim 10, said method comprising the additional step of removing any package carriers having a defective lens prior to said sealing step.
- 55 15. A method of inspecting and packaging molded contact lenses as claimed in claim 10, said method comprising the additional step of transporting said contact lens through said inspecting, removing, filling and sealing steps in said package carrier.



FIG. 1

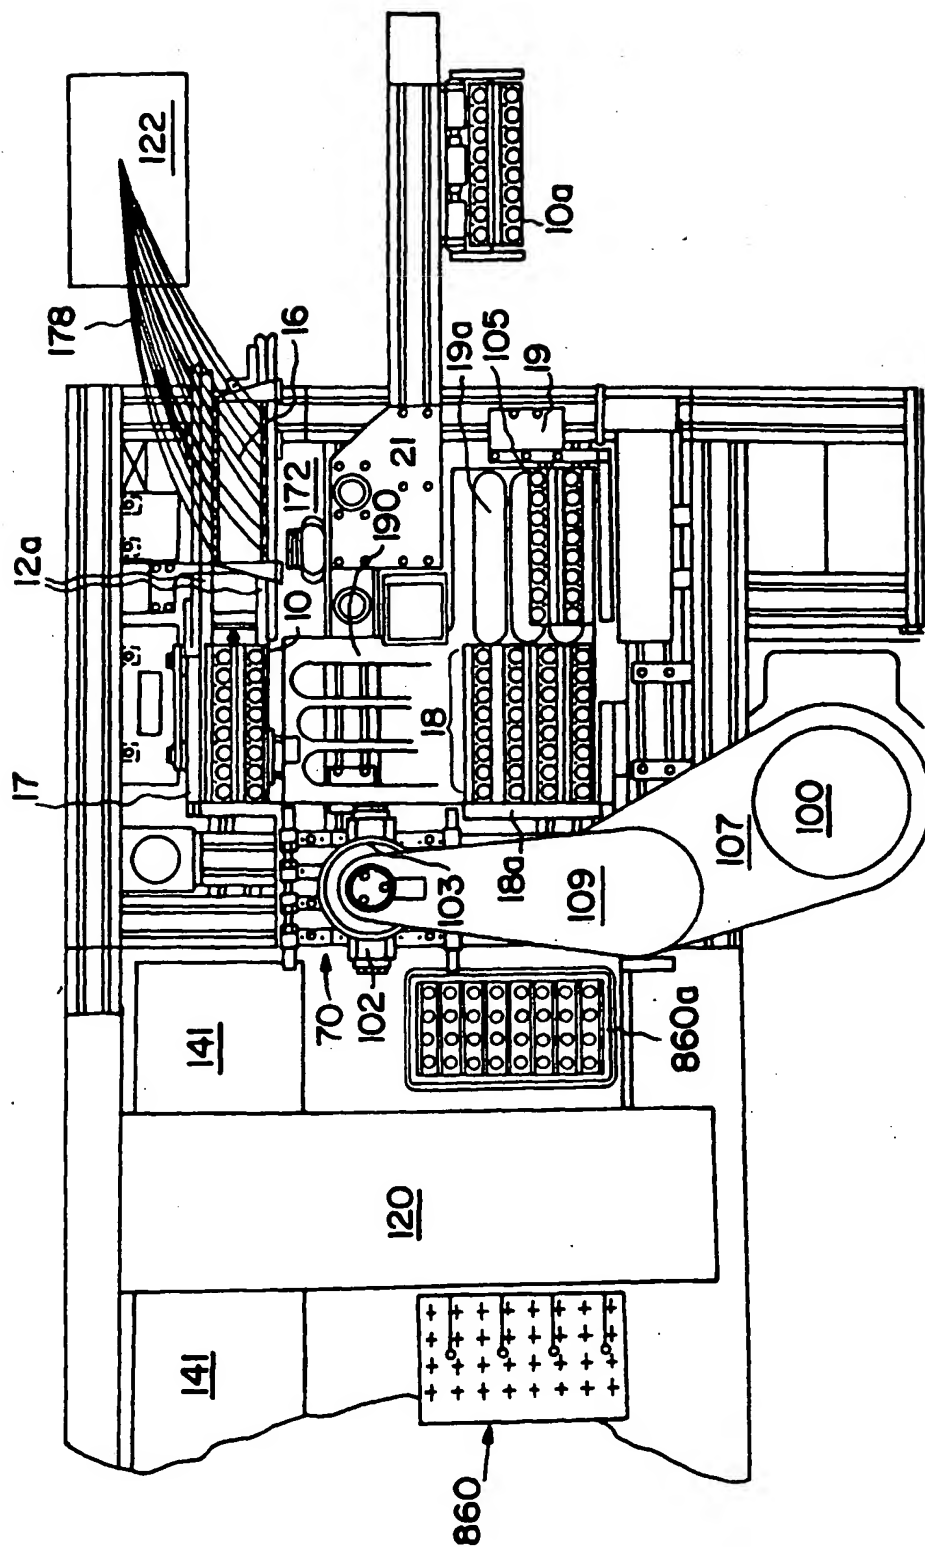
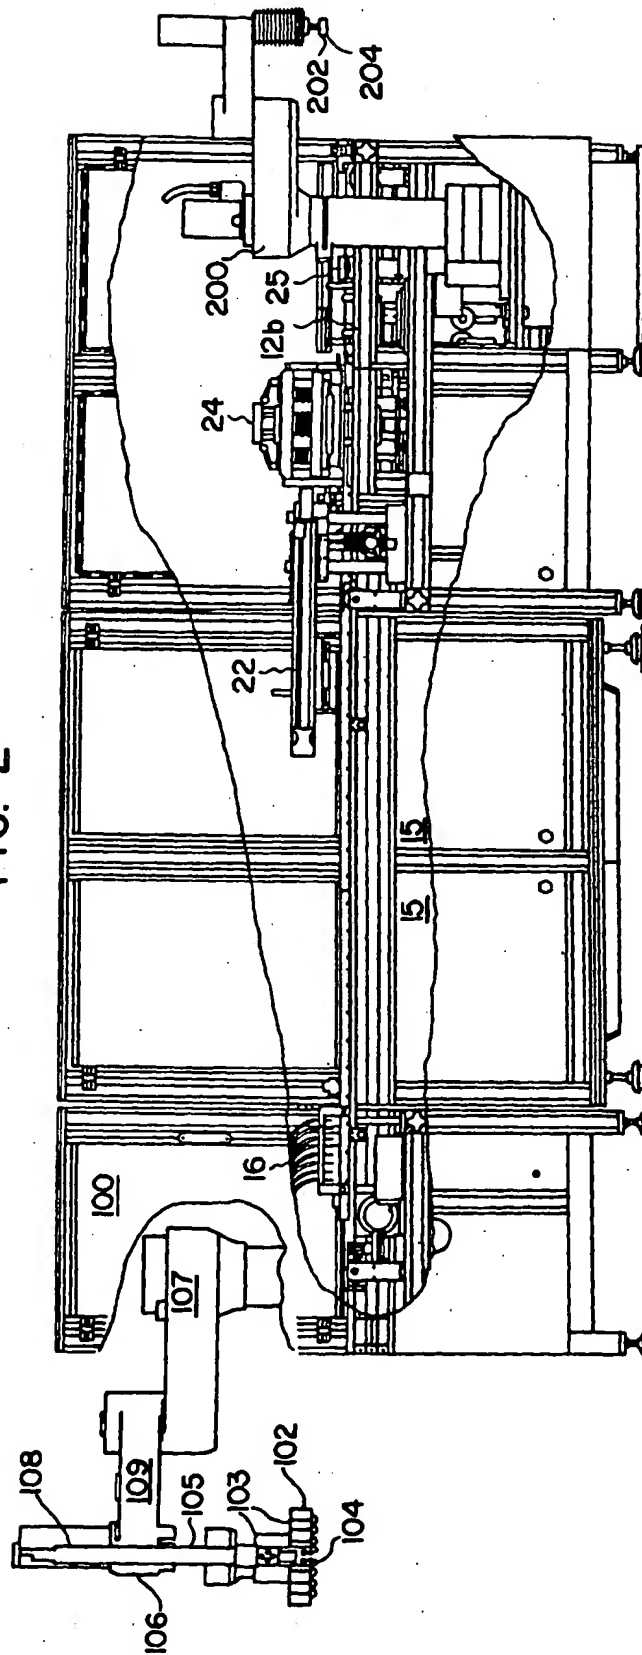


FIG. 2



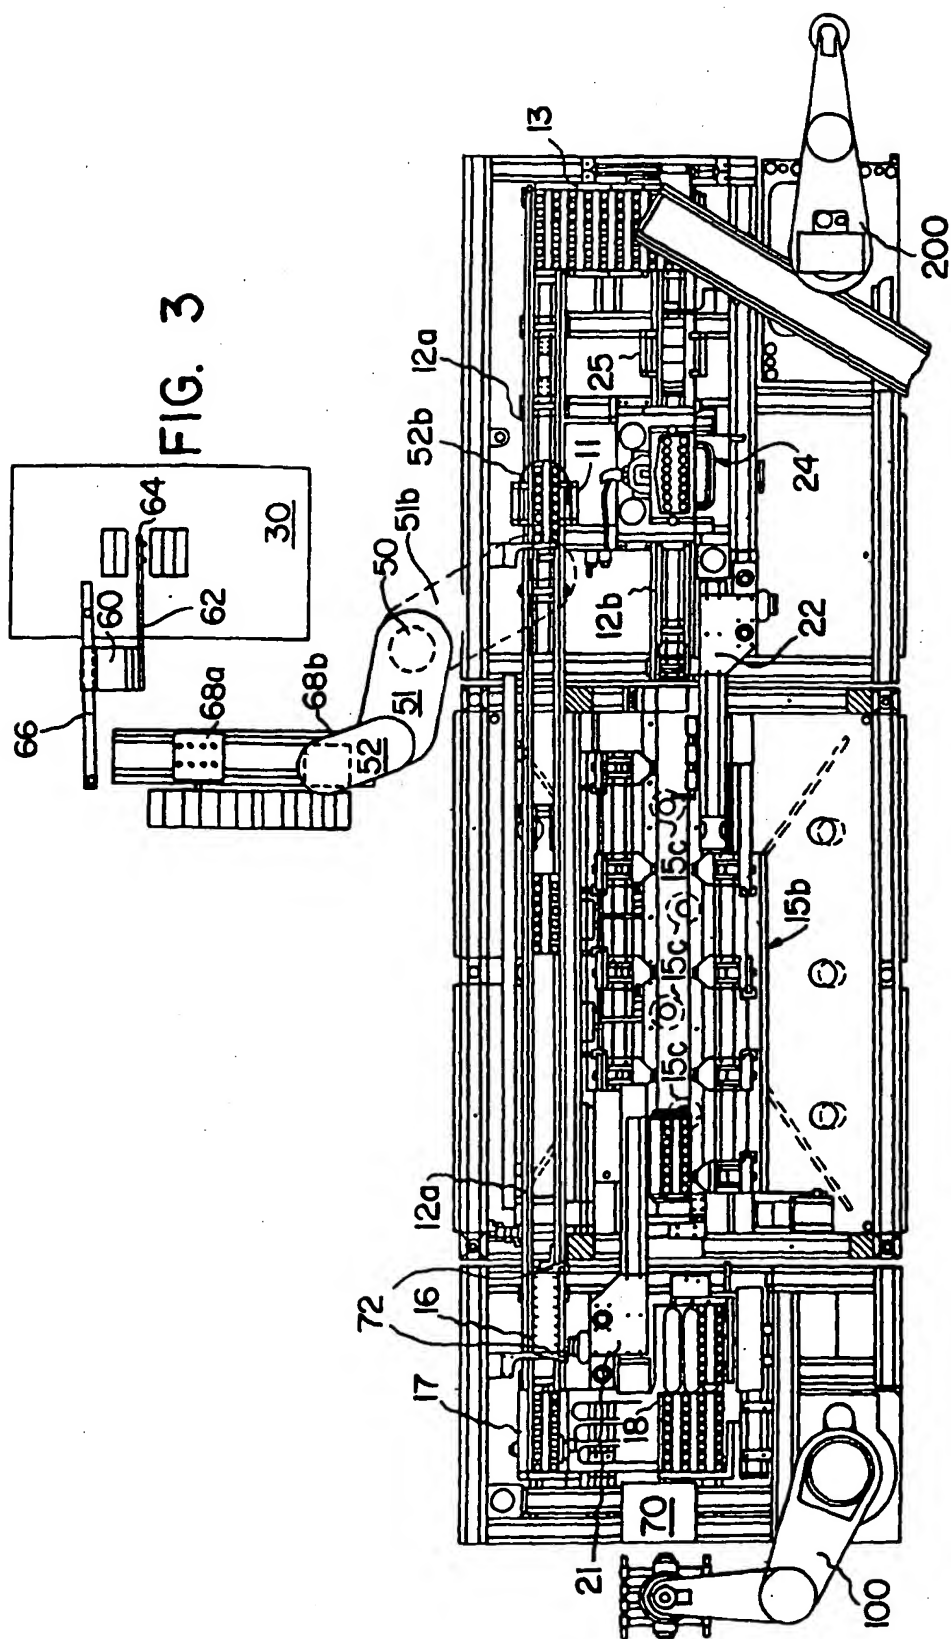


FIG. 4

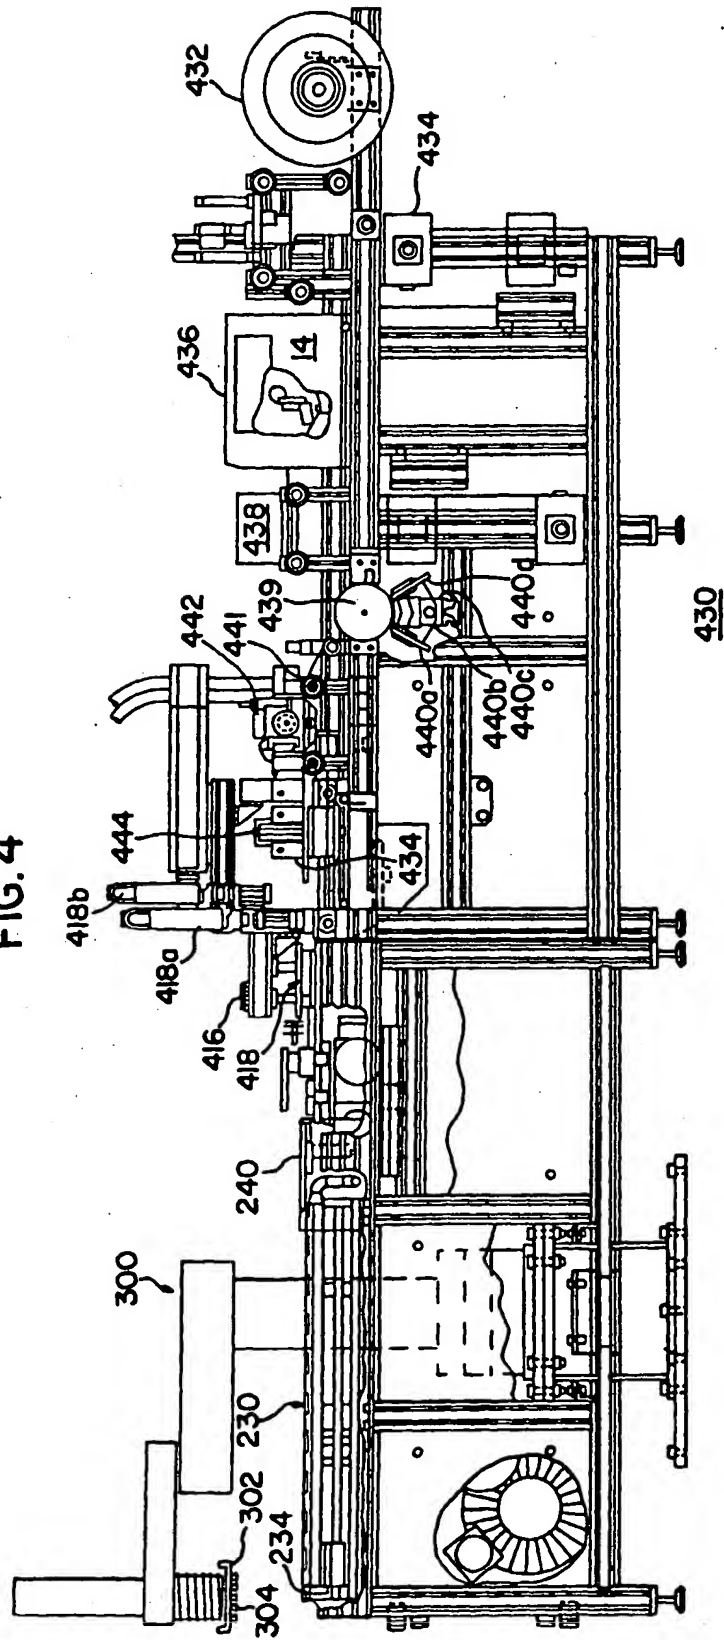


FIG. 5

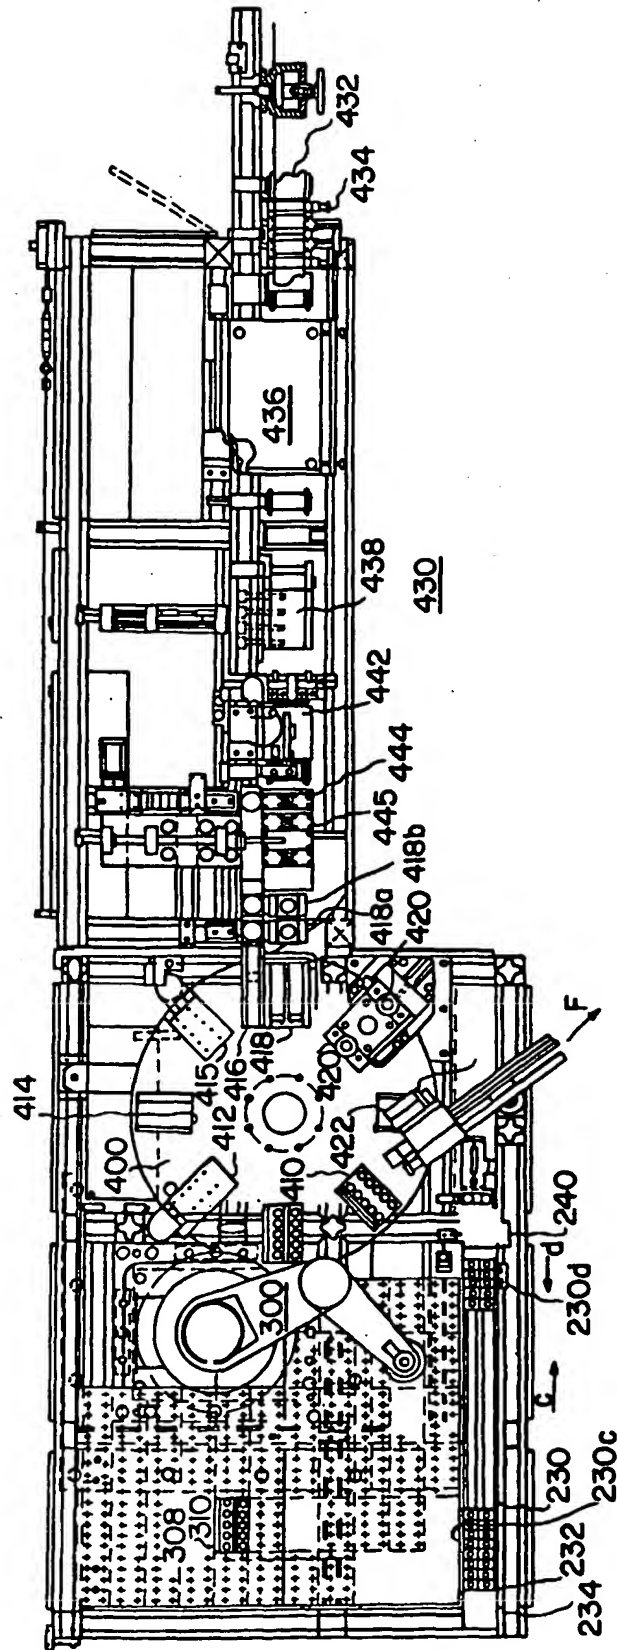


FIG. 6

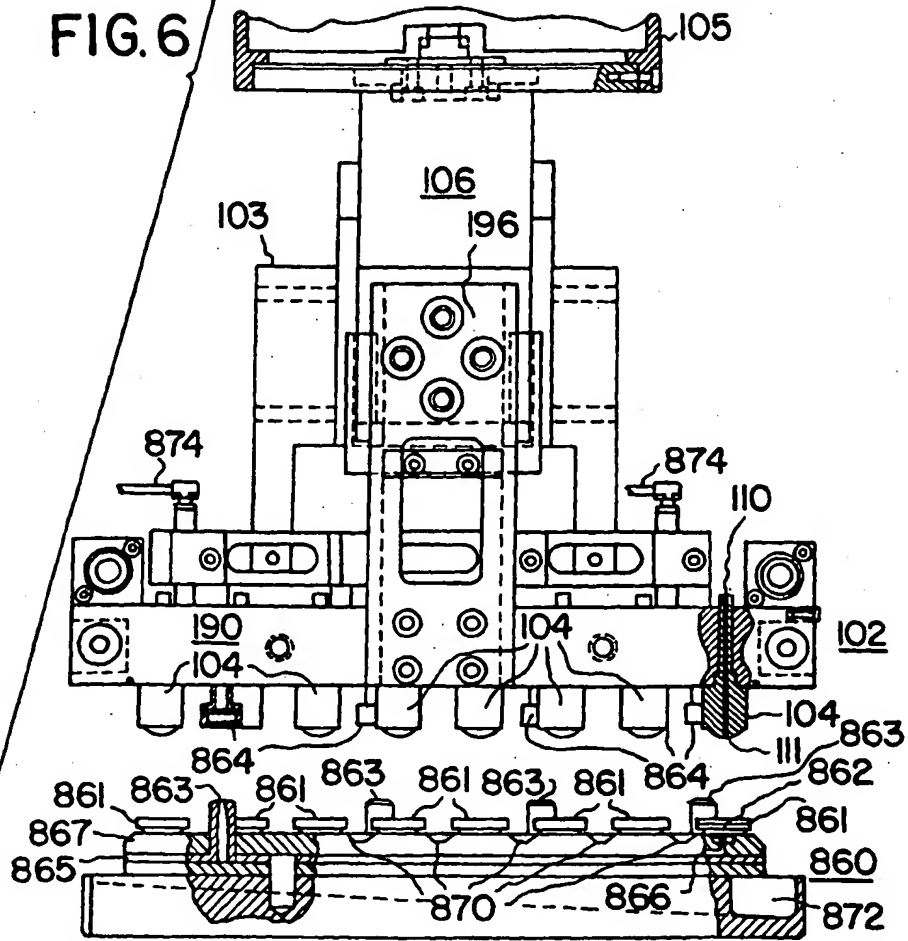


FIG. 7A

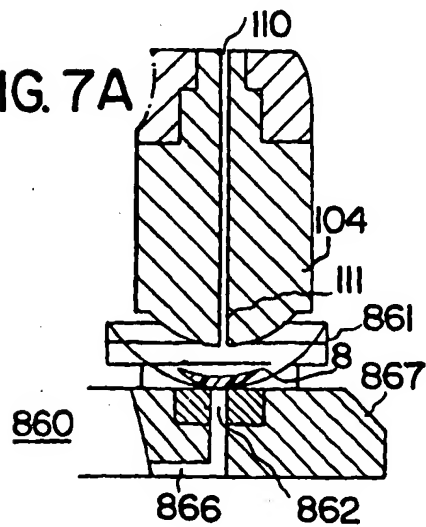


FIG. 7B

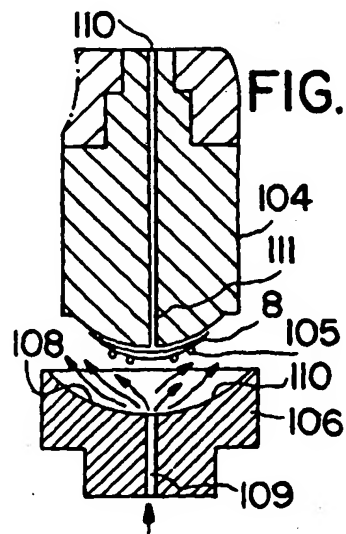




FIG. 8

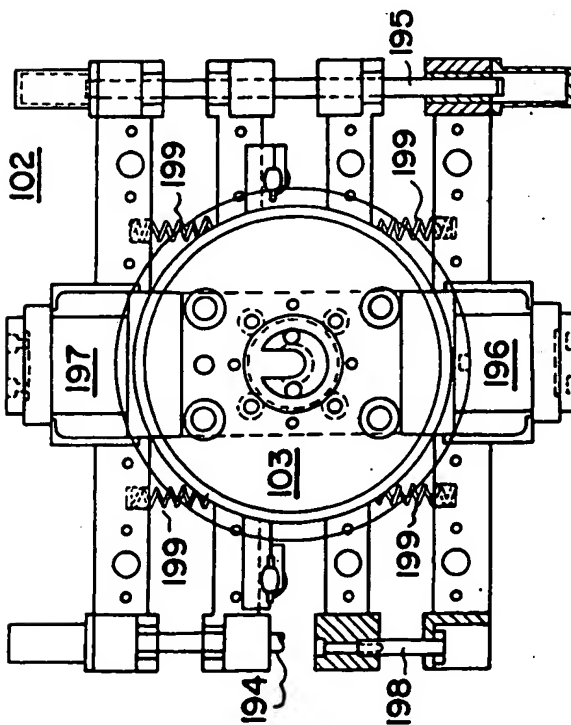


FIG. 9

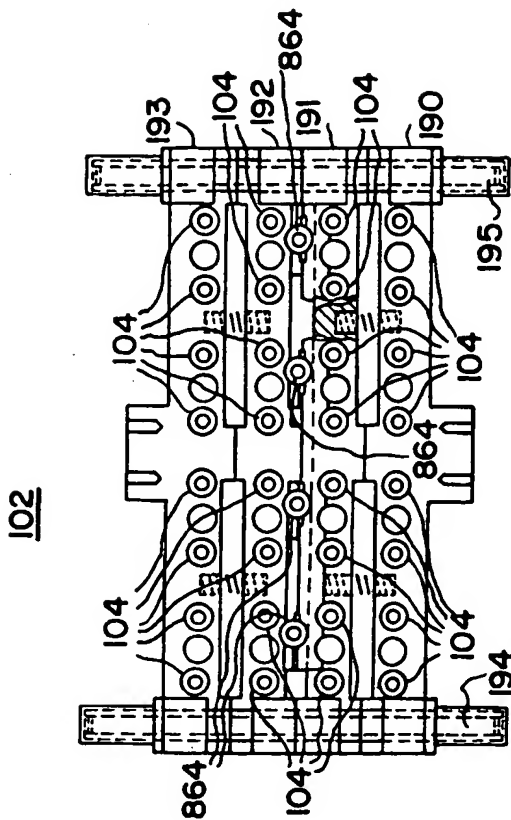


FIG.10

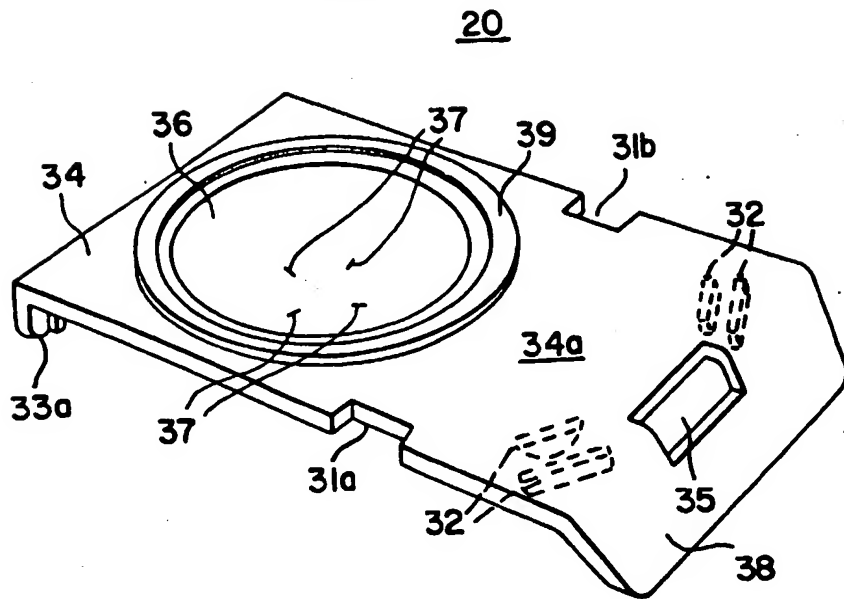


FIG.11

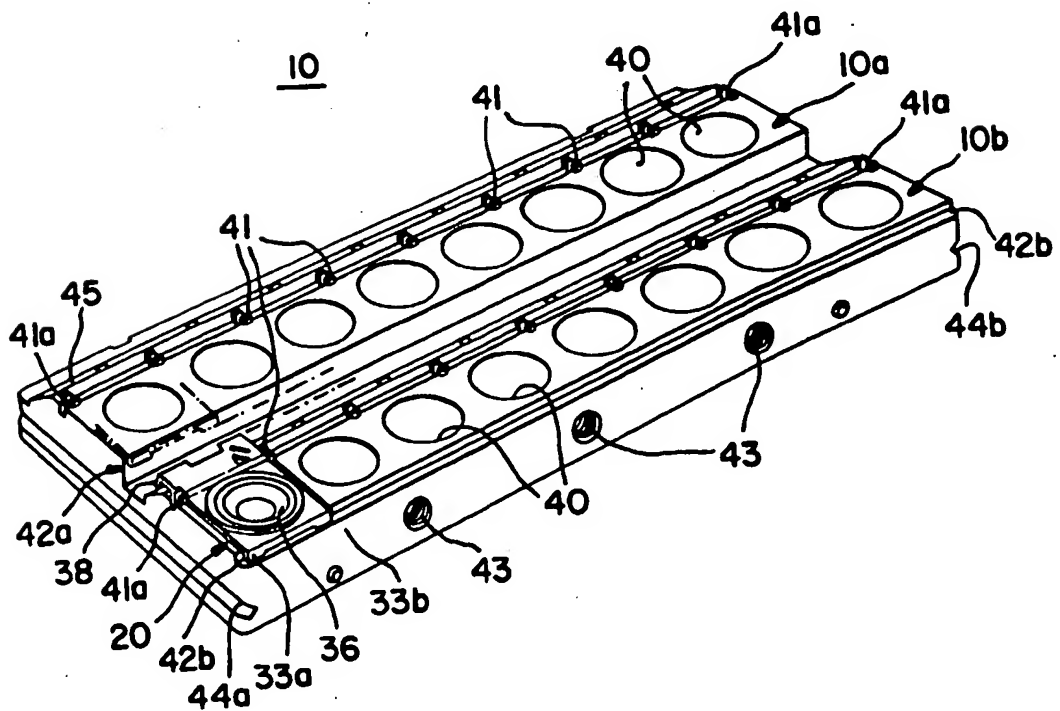


FIG. 13

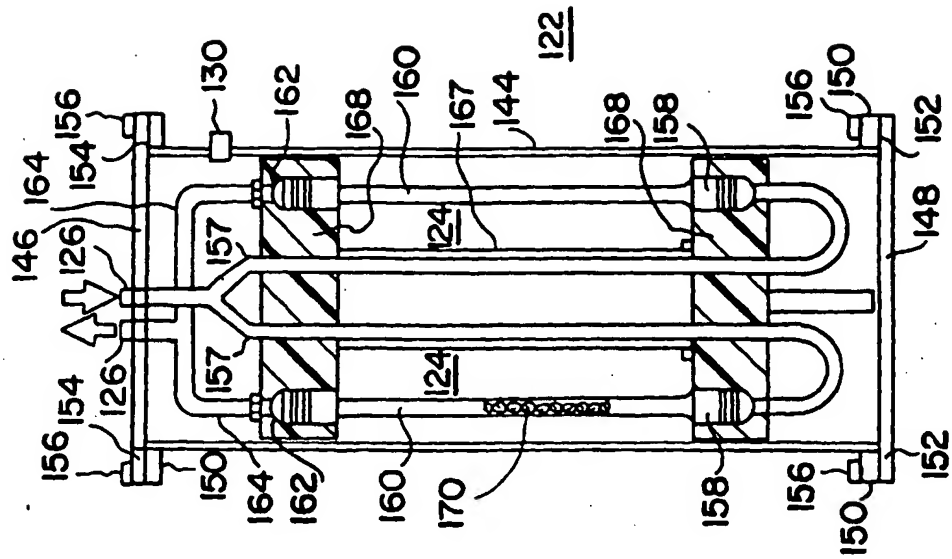


FIG. 12

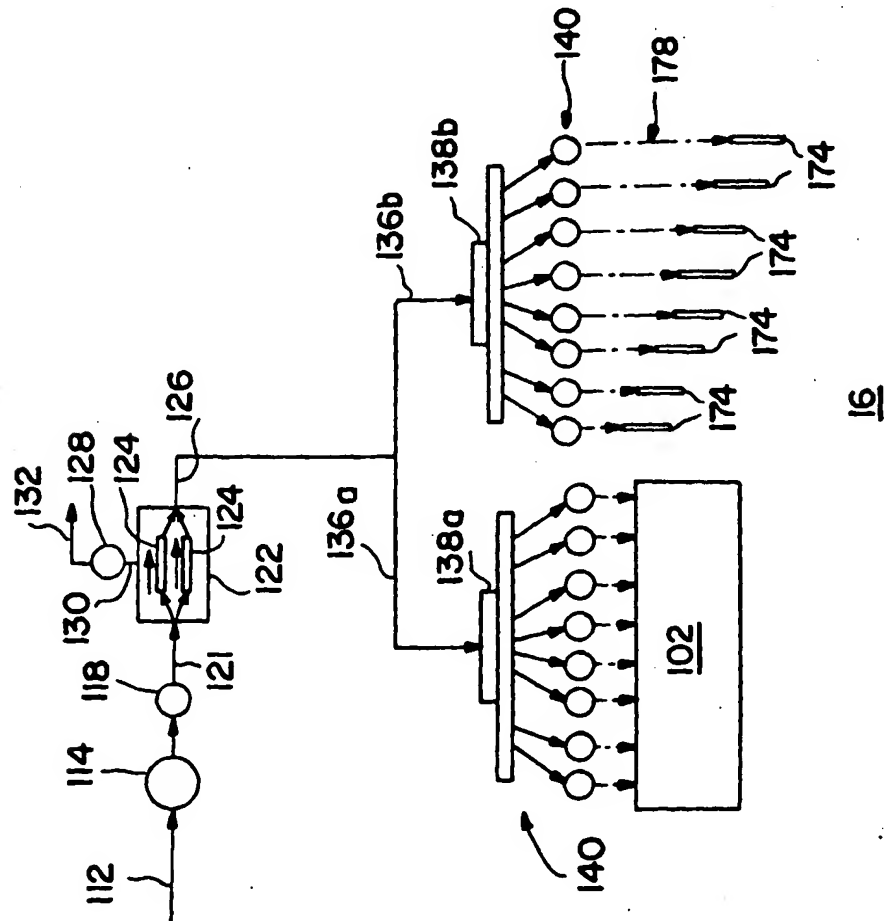


FIG. 14

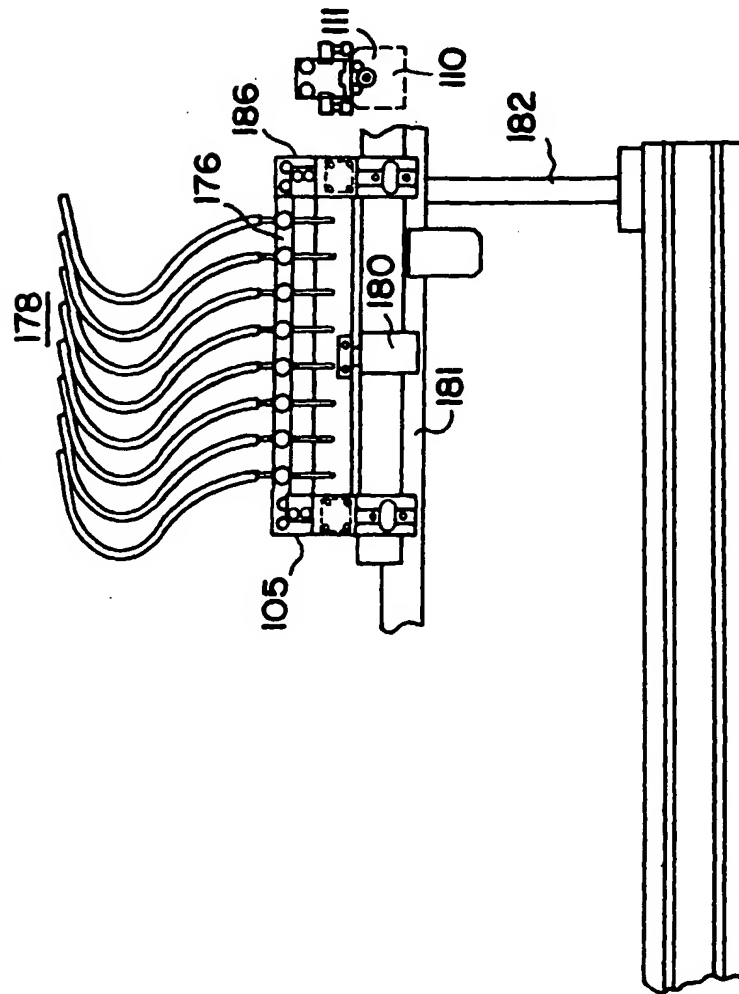


FIG. 15

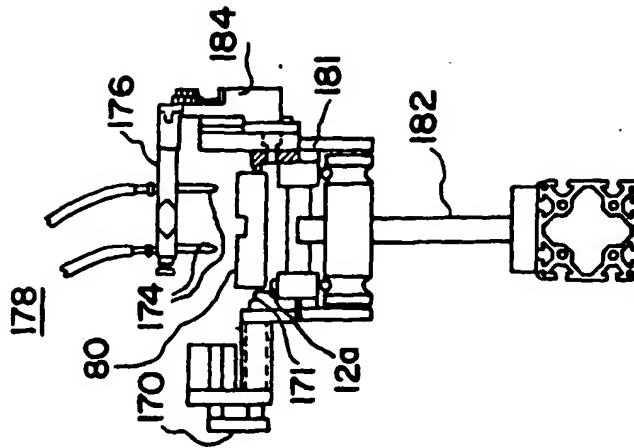


FIG. 16

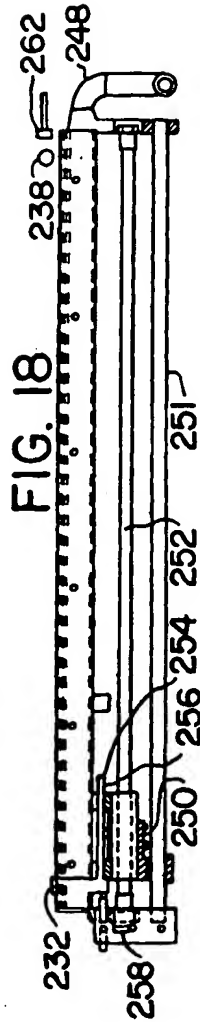
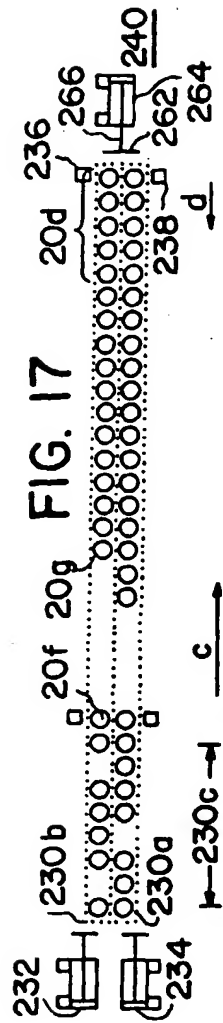
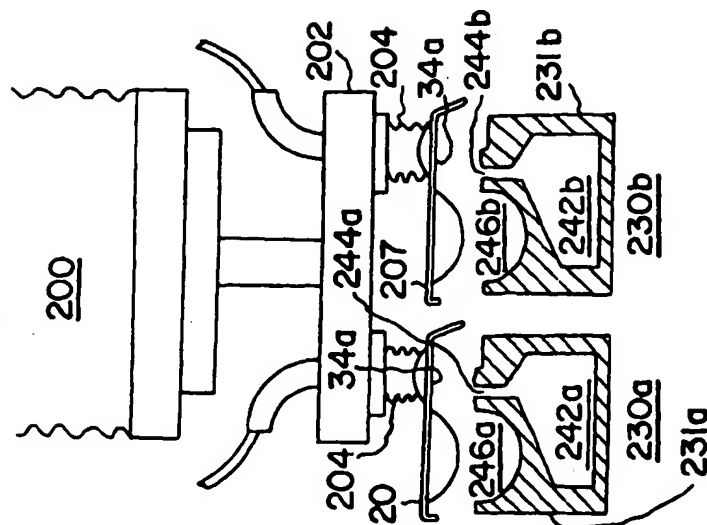


FIG. 19

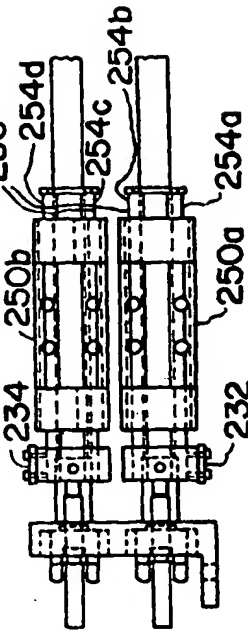


FIG. 20

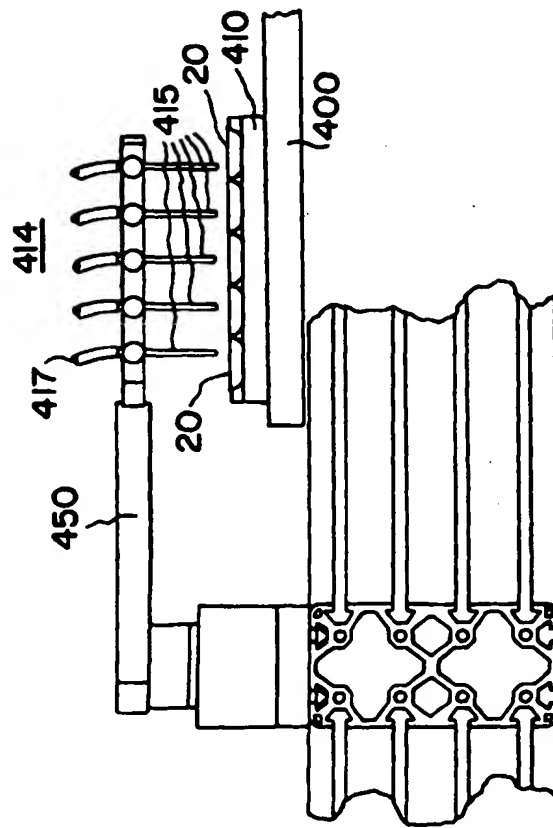


FIG. 22



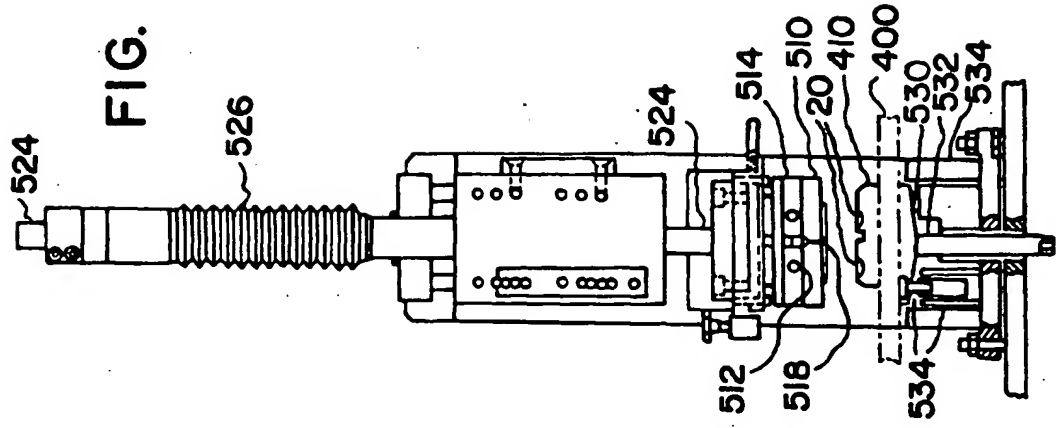




FIG. 21



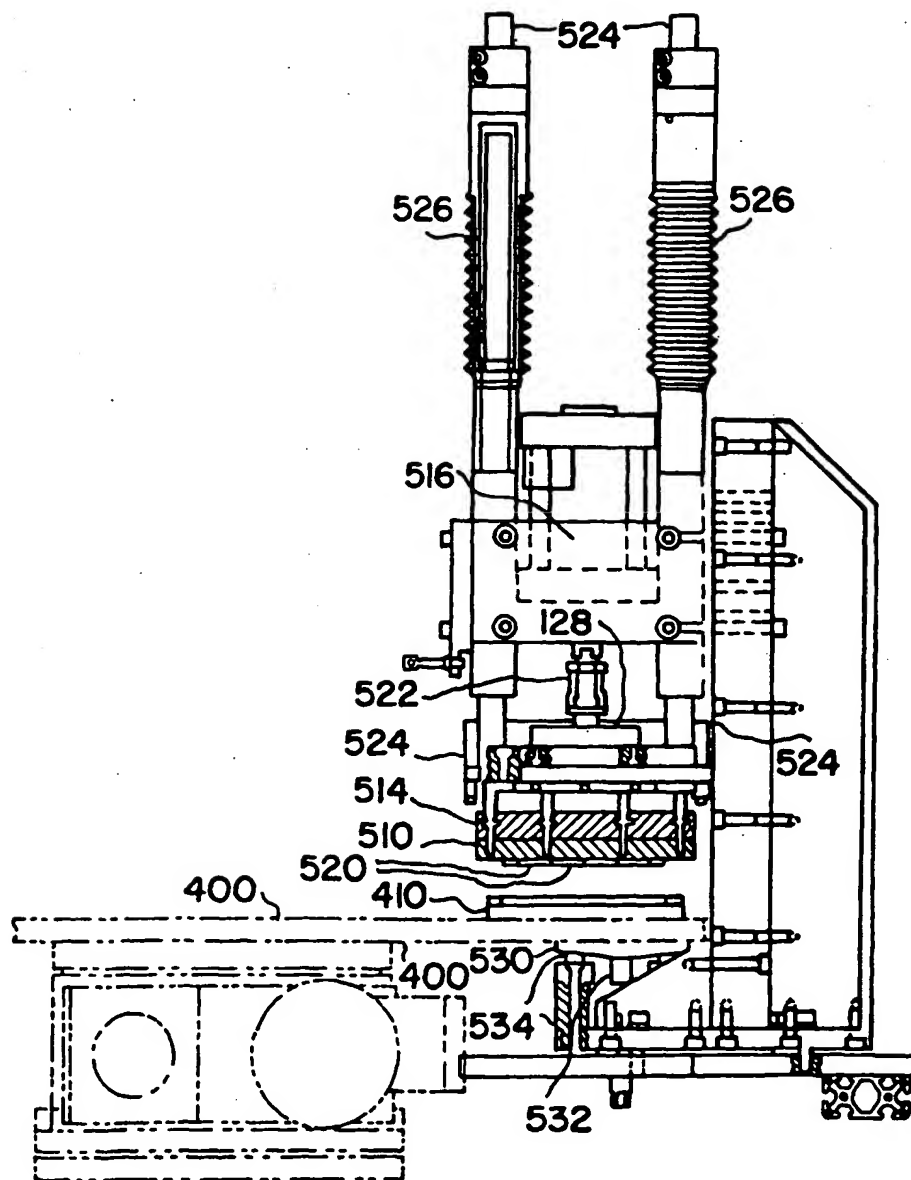



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 020 381 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
09.08.2000 Bulletin 2000/32

(51) Int. Cl.<sup>7</sup>: B65G 47/90

(43) Date of publication A2:  
19.07.2000 Bulletin 2000/29

(21) Application number: 00201222.7

(22) Date of filing: 09.06.1995

(84) Designated Contracting States:  
AT BE CH DE DK FR GB IE IT LI NL SE

(30) Priority: 10.06.1994 US 258557

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
95303995.5 / 0 686 585

(71) Applicant:  
JOHNSON & JOHNSON VISION PRODUCTS,  
INC.  
Jacksonville, Florida 32216 (US)

(72) Inventors:  
• Martin, Wallace Anthony  
Orange Park, Florida 32065 (US)  
• Edwards, Russell James  
Jacksonville, Florida 32258 (US)  
• Gundersen, Borge Peter  
3080 Tikob (DK)

- Keene, Darren Scott  
Jacksonville, Florida 32257 (US)
- Kindt-Larsen, Ture  
2840 Holte (DK)
- Lepper, John Mark  
West Jacksonville, Florida 32257 (US)
- Madsen, Niels Jorgen  
3450 Allerød (DK)
- Ravn, Thomas Christian  
3000 Helsignør (DK)
- Wang, Daniel Tsu-Fang  
Jacksonville, Florida 32225 (US)
- Holley, William Edward  
Ponte Vedra Beach, Florida 32087 (US)


(74) Representative:  
Mercer, Christopher Paul et al  
Carpmaels & Ransford  
43, Bloomsbury Square  
London WC1A 2RA (GB)

(54) Automated apparatus and method for preparing contact lenses for inspection and packaging

(57) An automated apparatus for automatically inspecting and packaging contact lenses (8) in a contact lens fabrication facility comprises an inspection pallet (10), an automatic lens inspection station (15), an artic-

ulated robotic transfer device (200), a controller and a second robotic transfer device (300).

FIG. 1

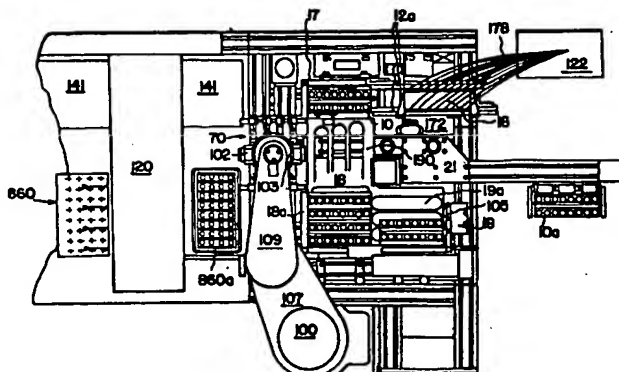



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 20 1222

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL7)
A	EP 0 183 324 A (I.O.R. INDUSTRIE OTTICHE RIUNITE) 4 June 1986 (1986-06-04) * the whole document *	1-9	B65G47/90 B29D11/00
A	EP 0 453 231 A (JOHNSON & JOHNSON VISION) 23 October 1991 (1991-10-23) * column 11, line 5 - line 55; claims 6-18 *	10-15	
			TECHNICAL FIELDS SEARCHED (InCL7)
			B29D B65G
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>20 June 2000</b>	Examiner <b>Mucs, A</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04/031)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 1222

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-06-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 183324	A	04-06-1986	IT 1177344 B	26-08-1987
			AU 5049685 A	05-06-1986
			JP 61132309 A	19-06-1986
EP 453231	A	23-10-1991	US 5080839 A	14-01-1992
			AT 135627 T	15-04-1996
			AU 643264 B	11-11-1993
			AU 7500491 A	24-10-1991
			BR 9101539 A	03-12-1991
			CA 2040520 A,C	18-10-1991
			CA 2149020 A	18-10-1991
			CA 2238144 A	18-10-1991
			CA 2238146 A	18-10-1991
			CA 2238153 A	18-10-1991
			CN 1058104 A,B	22-01-1992
			CS 9101060 A	19-02-1992
			CZ 9603176 A	15-04-1998
			DE 69118009 D	25-04-1996
			DE 69118009 T	02-10-1996
			DK 453231 T	15-04-1996
			EP 0645235 A	29-03-1995
			ES 2084769 T	16-05-1996
			FI 911835 A	18-10-1991
			GR 91100141 A,B	30-07-1992
			HK 147996 A	09-08-1996
			HU 3794 A	30-12-1996
			IE 74141 B	02-07-1997
			IL 97841 A	19-01-1996
			IL 113689 A	15-04-1997
			IL 113690 A	10-06-1997
			IL 115217 A	15-07-1998
			JP 4227643 A	17-08-1992
			KR 139200 B	01-05-1998
			MX 174204 B	27-04-1994
			NO 911339 A	18-10-1991
			NZ 237679 A	26-08-1992
			PT 97378 A	31-12-1991
			RU 2050285 C	20-12-1995
			ZA 9102849 A	30-12-1992

EPO FORM P0156

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**